


E12847



AMP connector

SDOGX040--D0000

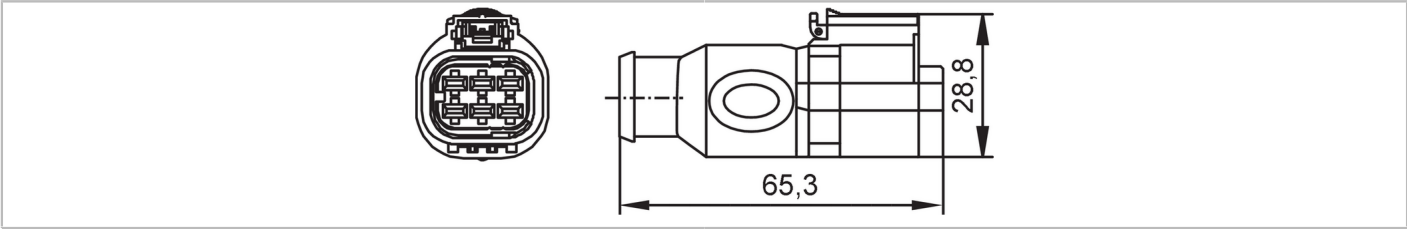

Application		
Application		for mobile applications
Electrical data		
Operating voltage	[V]	12...24 DC
Protection class		III
Max. current load total	[A]	16
Operating conditions		
Ambient temperature	[°C]	-40...100
Ambient temperature (moving)	[°C]	-15...80
Protection		IP 65; IP 67; (mating connector plugged in)
Mechanical data		
Weight	[g]	31
Molded-body material		TPU (urethane), Halogen-free
Sealing material		silicone
Remarks		
Pack quantity		1 pcs.

Electrical connection - Socket

Connector: 1 x AMP connector, straight; Moulded body: TPU (urethane), Halogen-free, black; sealing: silicone



Connection

