


E18267



CAN bus terminating resistor


M12 PASSTHROUGH W/RESISTOR

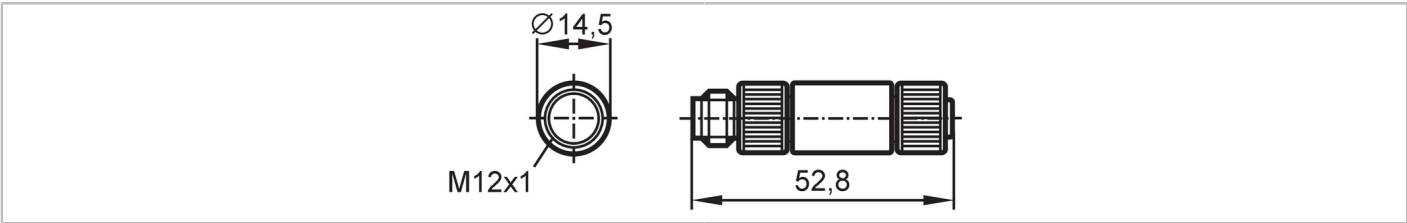


Application		
Special feature		gold-plated contacts
Application		Industrial applications; CAN bus
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 68
Mechanical data		
Weight	[g]	22.68
Dimensions	[mm]	14.5 x 14.5 x 52.8
Molded-body material		PVC
Material nut		brass, nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Contacts: 5, gold-plated; Moulded body: PVC; Locking: brass, nickel-plated



Connection

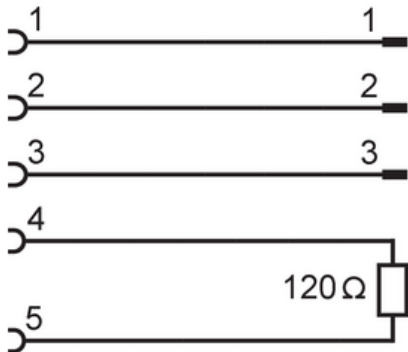

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 3, gold-plated; Moulded body: PVC; Locking: brass, nickel-plated

