


E18327



Female receptacle

RDOGH050MSS00.3E05

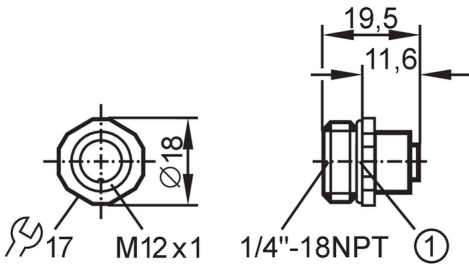

1 O-ring

| Application             |      |                              |
|-------------------------|------|------------------------------|
| Application             |      | Industrial applications      |
| Electrical data         |      |                              |
| Operating voltage       | [V]  | < 250 AC/DC                  |
| Max. current load total | [A]  | 4                            |
| Operating conditions    |      |                              |
| Ambient temperature     | [°C] | -25...90                     |
| Protection              |      | IP 68                        |
| Mechanical data         |      |                              |
| Weight                  | [g]  | 22.68                        |
| Mounting thread         |      | 1/4"-18NPT                   |
| Material                |      | housing: brass nickel-plated |
| Remarks                 |      |                              |
| Pack quantity           |      | 1 pcs.                       |

| Electrical connection           |  |
|---------------------------------|--|
| Cable: 0.5 m, PVC; 5 x 0.34 mm² |  |

| Electrical connection - Socket             |  |
|--------------------------------------------|--|
| Connector: 1 x M12; coding: A; Contacts: 5 |  |
|                                            |  |

| Connection    |              |
|---------------|--------------|
| 1             | BN           |
| 2             | WH           |
| 3             | BU           |
| 4             | BK           |
| 5             | GN/YE        |
| Core colors : |              |
| BK =          | black        |
| BN =          | brown        |
| BU =          | blue         |
| GN/YE =       | green/yellow |
| WH =          | white        |