


E2M261



Female wirable connectors

WIRABLE SOCKET M16 4P FEMALE

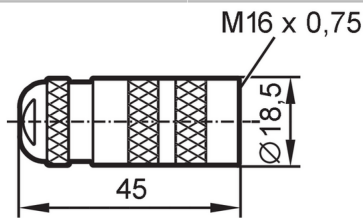

Application

Special feature	gold-plated contacts
Application	Industrial applications

Electrical data

Operating voltage [V]	< 250 DC
Protection class	III
Max. current load total [A]	6

Operating conditions

Ambient temperature [°C]	-30...95
Protection	IP 67
Pollution degree	1

Mechanical data

Weight [g]	38.2
Material	housing: brass nickel-plated; sealing: PBT
Molded-body material	brass, nickel-plated
Sealing material	PBT


Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection - Socket

4 x 0.75 mm²; Cable sheath: Ø 4.1...7.8 mm

Connector: M16, straight; Contacts: gold-plated; Moulded body: brass, nickel-plated; sealing: PBT



Connection

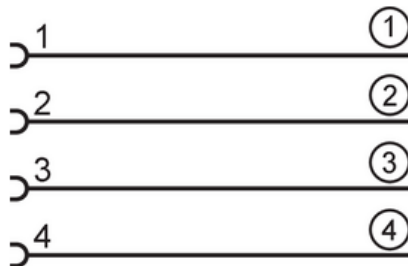

1	coax cable core
2	coax screen
3	red
4	black