




Cover plug for process connections

ADAPTER PLUG ASEPTOFLEX VARIO

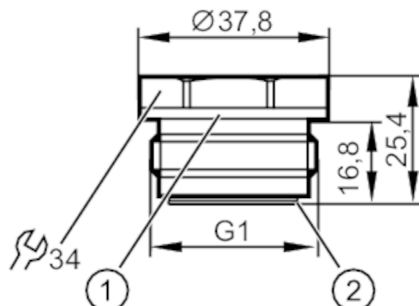

- 1 groove for sealing ring DIN 3869-33-FKM
 2 groove for O-ring 24 x 2 (EPDM) or optional sealing rings

EC 1935/2004 EHEDG Certified FCM FDA

Application		
Pressure rating	[bar]	100
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	203
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm; Gasket: FKM	
Process connection	threaded connection G 1 external thread Aseptoflex Vario	
Accessories		
Items supplied	O-rings: 1 x (24 x 2 mm), EPDM in contact with the medium, E30054 sealing rings: 1, DIN 3869-33-FKM	
Accessories (optional)	O-ring: 24 x 2 (FKM), in contact with the medium, E30123 sealing ring: PEEK, in contact with the medium, E30124	
Remarks		
Pack quantity	1 pcs.	