


E30436



Patchcords with valve plug


PLUG M12 - DIN VALVE FORM A

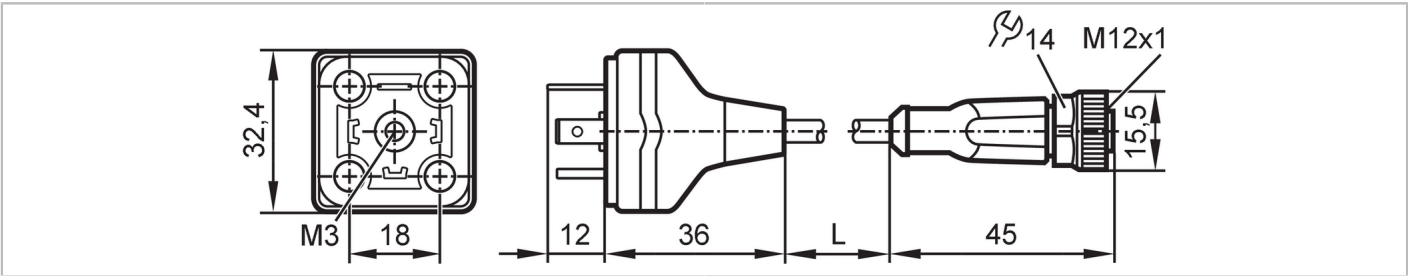

Application		
Special feature		Free from silicone; Halogen-free
Application		Industrial applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 65
Mechanical data		
Weight	[g]	66.7
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Sealing material		FKM
Remarks		
Pack quantity		1 pcs.

Electrical connection - plug

Connector: 1 x valve type A DIN, straight; Contacts: 4; Moulded body: TPU (urethane), black; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm



E30436




Patchcords with valve plug

PLUG M12 - DIN VALVE FORM A

Electrical connection

Cable: 0.4 m, PUR, Halogen-free, black, Ø 5.5 mm; 5 x 0.50 mm²

Connection

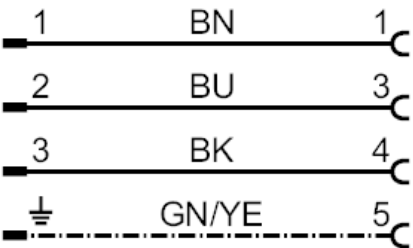

Core colors :
BK = black
BN = brown
BU = blue
GN/YE = green/yellow

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Contacts: 4; Moulded body: TPU (urethane), black; Locking: brass, nickel-plated; sealing: FKM; Tightening torque: 0.6...1.5 Nm

