


E30500



Welding adapter for process sensors

WELDING ASEPTO ADAPT D38/G1

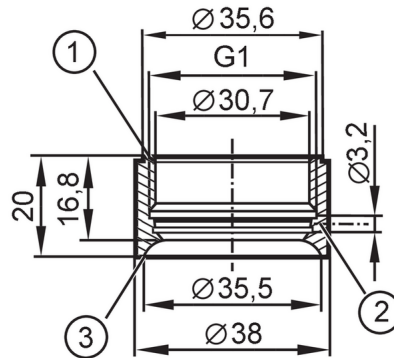

- 1 Aseptoflex Vario
- 2 Leakage port
- 3 sealing area

EHEDG Certified

Application		
Design	with leakage port (3A), for installation of LDL20x	
Pressure rating	50 bar	5 MPa
Note on pressure rating	for the connection sensor - adapter	
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	113.8
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection	G 1 Aseptoflex Vario	
Process connection	Welding adapter 1,5" (38,1 x 1,65); Maße gemäß DIN 11866; Reihe C ASME-BPE	
Remarks		
Pack quantity	1 pcs.	