




Welding adapter for process sensors

WELD ADAPT COLLAR G1 ASEPT PIPE DIN DN40

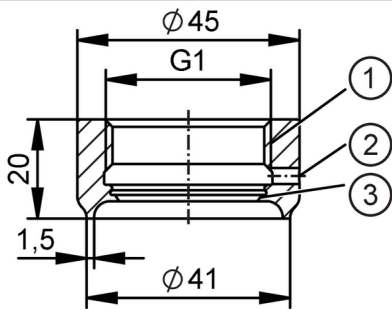

- 1 G1 Internal thread Aseptoflex Vario
- 2 Leakage port
- 3 sealing area



EC 1935/2004 EHEDG Certified FDA

Application		
Design	with leakage port (3A)	
Installation	for pipes	
Pressure rating	40 bar	4 MPa
Note on pressure rating	for the connection sensor - adapter	
	professional welding according to operating instructions	
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	158.2
Materials (wetted parts)	stainless steel (1.4435 / 316L)	
Sensor connection	G 1 Internal thread Aseptoflex Vario	
Process connection	Welding adapter DN40 (41 x 1,5); Maße gemäß DIN 11866; Reihe A DIN	
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.8 µm / Rz = 4 µm	
Sealing	Gasket	
Accessories		
Items supplied	O-rings: 1 x (24 x 2 mm), EPDM, E30054	
Accessories (optional)	O-ring 1 x 24 x 2, FKM, E30123	
Remarks		
Pack quantity	1 pcs.	