




Process adapter Tri-Clamp

ADA IFM-CLAMP ISO2852 1.5" 3A

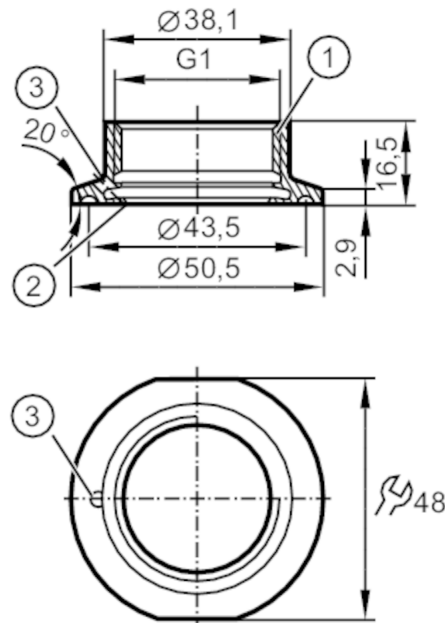

- 1 Aseptoflex Vario
- 2 sealing area
- 3 Leakage port



CRN EC 1935/2004 EHEDG Certified FCM FDA

Application		
Design	with leakage port (3A)	
Pressure rating	16 bar	1.6 MPa
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	100
Materials (wetted parts)	stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection	G 1 Internal thread Aseptoflex Vario	
Process connection	Clamp DN25...DN40 (1...1,5") Ø 50.5 mm DIN 32676 (ISO 2852)	
Sealing	Gasket	
Hygienic equipment class to DIN 11866	H4	
Accessories		
Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054	
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123	
	sealing ring: 1, PEEK, FDA compliant, E30124	
Remarks		
Pack quantity	1 pcs.	