




E3M159



Extension cord

CONNECTION CABLE M12 5M EXT.

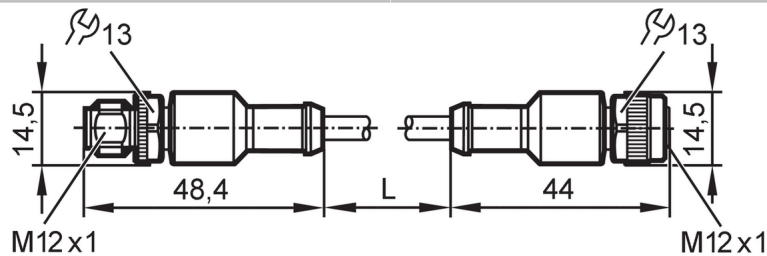

Application		
Special feature	screened cable; Drag chain suitability	
Design	extension for O3M connection cable for 3D Smart sensor mobile with analog video output PAL	
Application	Industrial applications	
Electrical data		
Operating voltage	[V]	< 25 AC / < 60 DC
Protection class	III	
Operating conditions		
Ambient temperature	[°C]	-40...80
Protection	IP 67; IP 69K	
Mechanical data		
Weight	[g]	274.3
Dimensions	[mm]	14.5 x 14.5 x 48.4
Material	housing: PUR; sealing: FKM; contact pins: CuSn6 nickel-plated and tin-plated	
Material nut	stainless steel (1.4305 / 303)	
Drag chain suitability	yes	
Drag chain suitability	Bending radius for fixed installation	≥ 60 mm
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 5 m, TPU (urethane), black, Ø 6 mm, screened; Impedance 75 Ω		
Electrical connection - Socket		
Connector: 1 x M12, straight; coding: A; Contacts: 5; Locking: stainless steel (1.4305 / 303)		
		
Electrical connection - plug		
Connector: 1 x M12, straight; coding: A; Contacts: 5; Locking: stainless steel (1.4305 / 303)		
		


E3M159



Extension cord

CONNECTION CABLE M12 5M EXT.

Connection

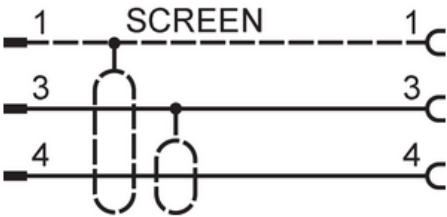

- 1: screen
- 2: not used
- 3: coax screen
- 4: coax cable core
- 5: not used