


E3R106



Connection cable

ADAPTER HFM Y CABLE / 2 X FAKRA

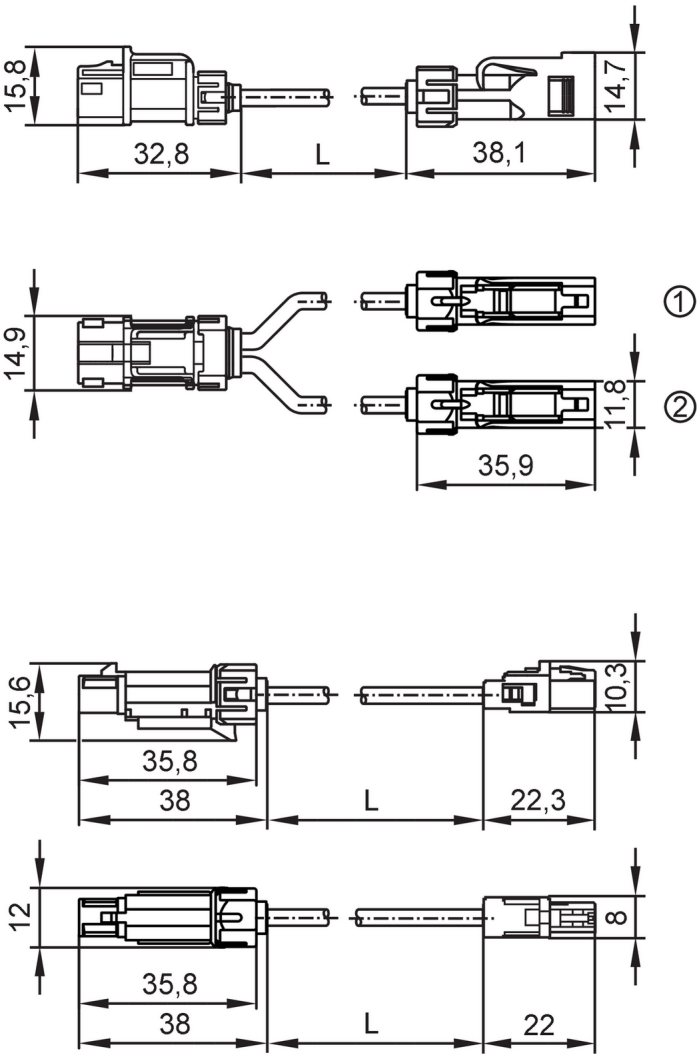

Application		
Application		Industrial applications
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Damping	[dB/m]	1.6
Internal resistance (Ri)	[Ω]	50; (± 3 %)
Operating conditions		
Ambient temperature	[°C]	-10...60
Ambient temperature (moving)	[°C]	-10...60
Protection		IP 54
Mechanical data		
Weight	[g]	43.85
Material		housing: PBT-GF20

E3R106



Connection cable

ADAPTER HFM Y CABLE / 2 X FAKRA

Fixed installation		
Min. bending radius	[mm]	19.8
Loose installation		
Min. bending radius	[mm]	56
Remarks		
Pack quantity		1 pcs.
Electrical connection - 2D/3D camera		
Connector: 1 x HFM-Dual, straight		
Electrical connection		
Cable: 0.3 m, black, Ø 3.3 mm		
Electrical connection - Video Processing Unit		
Connector: 2 x HFM-Single, straight; to HF Single, straight		