


E3R110



Connection cable

HF FAKRA CABLE 2x S/S/M S/S/F A DRAG 5M

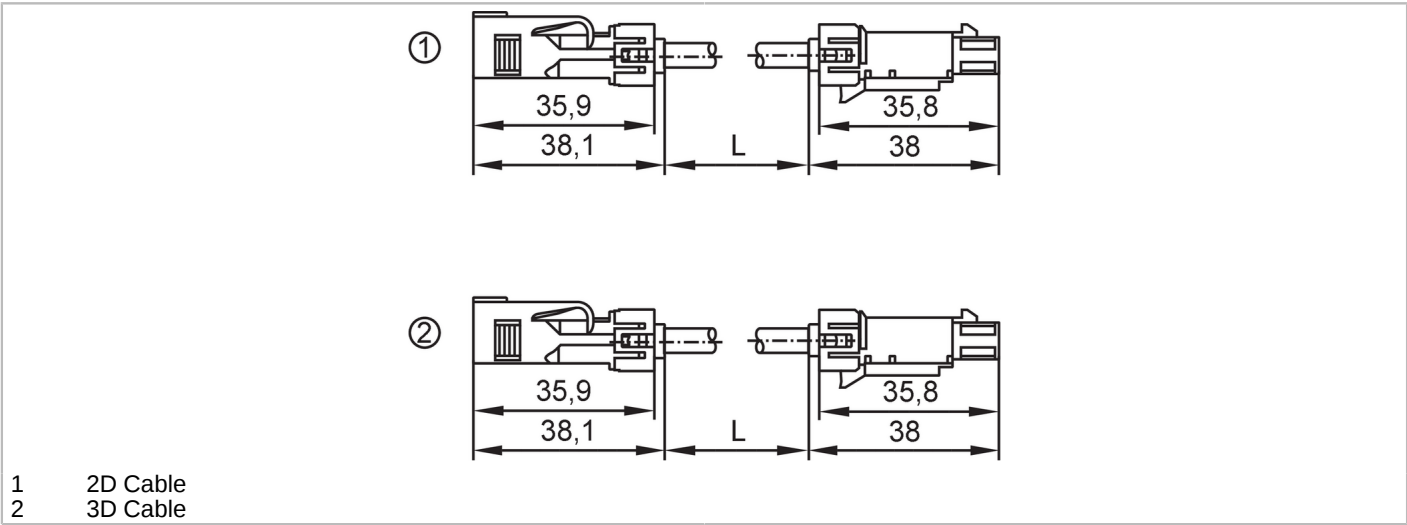

Application		
Special feature		Drag chain suitability
Application		Industrial applications
Oil resistant		yes
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Damping	[dB/m]	1.6
Internal resistance (Ri)	[Ω]	50; (± 3 Ω)
Operating conditions		
Ambient temperature	[°C]	-10...60
Ambient temperature (moving)	[°C]	-10...60
Protection		IP 54
Mechanical data		
Weight	[g]	340.4
Material		Cable: PUR black
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	85 mm
	Bending radius for fixed installation	60 mm
	Bending radius	80 mm
	Bending cycles	2.000.000
	Travel speed	max. 4 m/s at 4 m horizontal travel length and max. acceleration of 8 m/s ²
Fixed installation		
Min. bending radius	[mm]	19.8
Loose installation		
Min. bending radius	[mm]	56

E3R110



Connection cable

HF FAKRA CABLE 2x S/S/M S/S/F A DRAG 5M

Accessories	
Accessory required	Adapter cable, E3R106
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Connector: 2 x HF-Single, straight	
Electrical connection	
Cable: 5 m, black, Ø 5.6 mm	