


E40129



Process adapter for small volumetric flow quantities

FLOW ADAPT SI

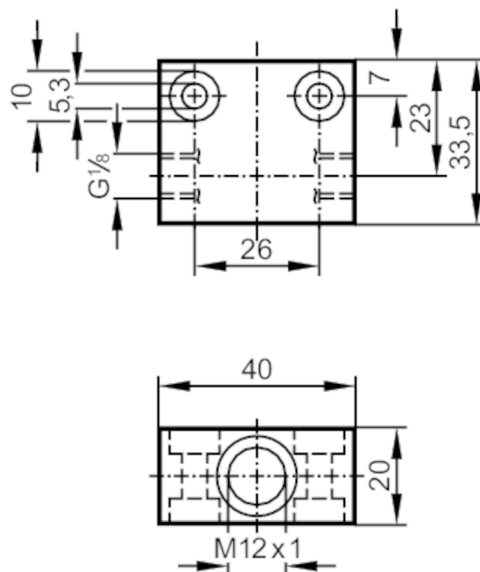

Application

Design	for flow sensors and compact flow monitors
Application	for industrial applications
Installation	via internal G1/8A male thread, any mounting position
Media	liquids and gases
Medium temperature [°C]	0...80; (Max. temperature gradient of medium: 1 K/min)
Pressure rating	300 bar 30 MPa

Measuring/setting range

Flow range [ml/min]	2...100
---------------------	---------

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight [g]	156.5
Dimensions [mm]	M12 x 1
Thread designation	M12 x 1
Material	stainless steel (1.4404 / 316L)
Sensor connection	M12 x 1
Process connection	G 1/8

Accessories

Items supplied	sealings: 1, U-seal
Accessories (optional)	Adapter: ≤ 30 bar, E40101 Adapter: ≤ 300 bar, E40236

Remarks

Remarks	Can only be used in combination with the flow sensor's relative operating mode.
Pack quantity	1 pcs.