


E40159



Process adapter for small volumetric flow quantities

FLOW ADAPT SF PTFE

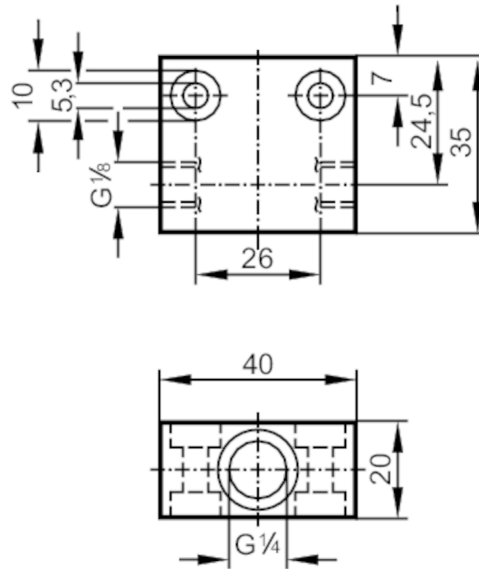

Application		
Design	for flow sensors with ceramic probe G¼	
Installation	via internal G1/8A male thread, any mounting position	
Medium temperature	[°C]	0...80
Pressure rating	30 bar	3 MPa
Measuring/setting range		
Flow range	[ml/min]	2...50
Tests / approvals		
Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	
Mechanical data		
Weight	[g]	48
Material	PTFE	
Sensor connection	G 1/4	
Process connection	G 1/8	
Accessories		
Accessory required	Adapter: 1 x G1/4 BSPP, in combination with a flow sensor from the SI series, E40176	
Remarks		
Remarks	Can only be used in combination with the flow sensor's relative operating mode.	
Pack quantity	1 pcs.	