


E40182



Process adapter for small volumetric flow quantities

ADAPTBLOCK D16 G1/2 PVC

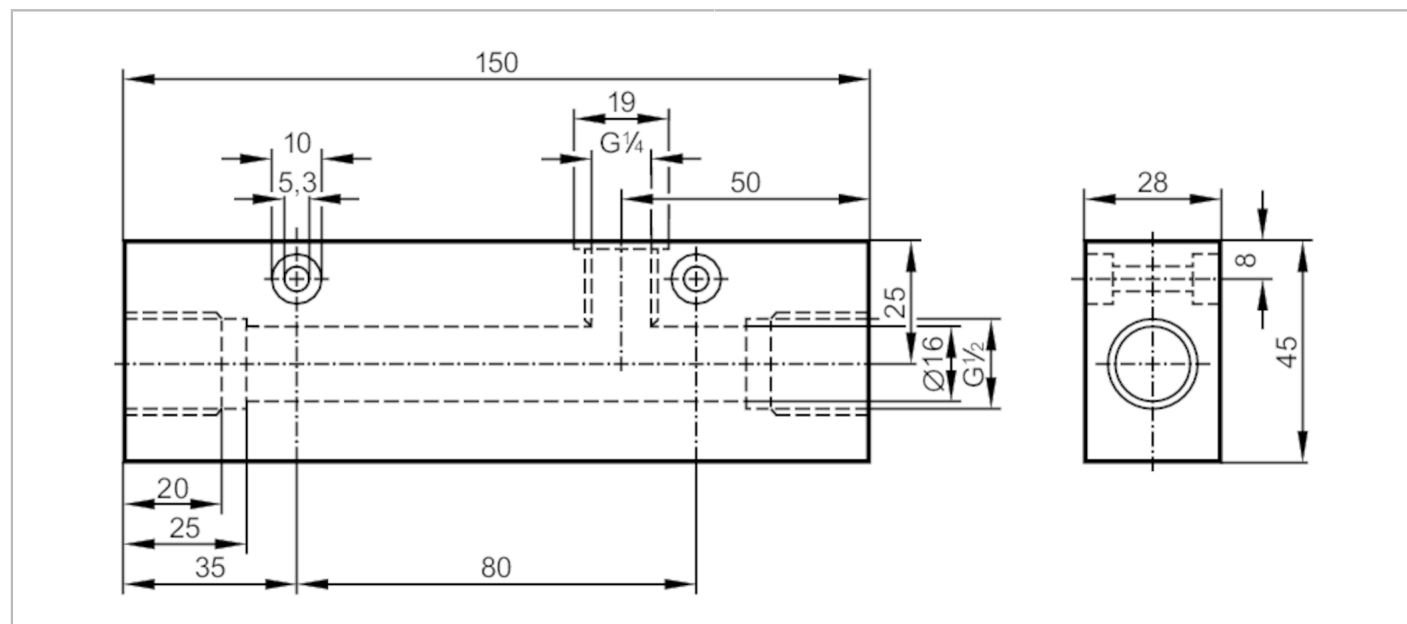

Application

Design	for flow sensors SID, SF5	
Flow range [l/min]	0.5...5; ((SI1xxx); 0.5...7 (SI5xxx); factory setting with water)	
Application	for industrial applications	
Media	liquids and gases	
Medium temperature [°C]	-25...60	
Pressure rating	6 bar	0.6 MPa

Mechanical data

Weight	[g]	375.5
Material		PVC
Sensor connection		M18 x 1,5
Process connection		G 1/2

Accessories

Items supplied	Adapter: 1 x G1/4 BSPP, E40099 sealings: 1, U-seal
----------------	---

Remarks

Remarks	Can only be used in combination with the flow sensor's relative operating mode.
Pack quantity	1 pcs.