




Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN15

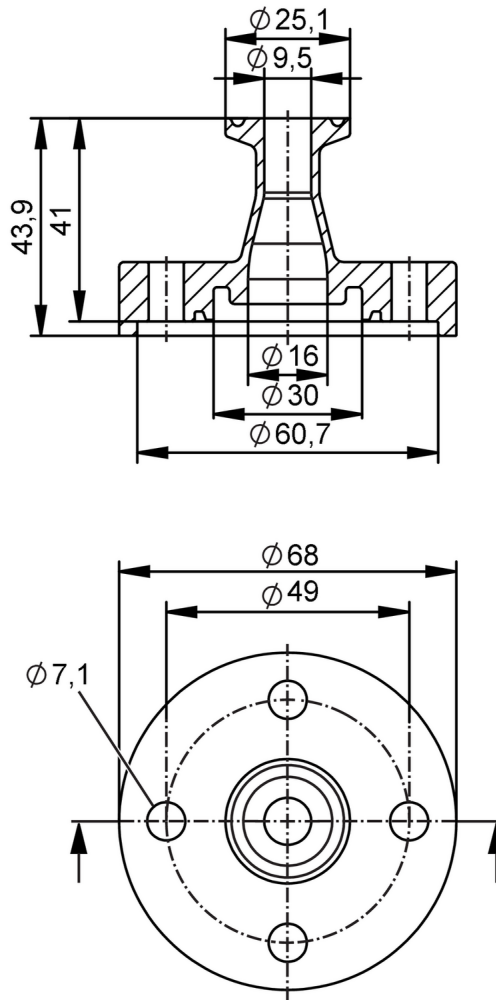

FCM

Hygienic
Cleanable

Application

Design	for flow meter SMF	
Application	food and beverage industry; hygienic systems	
Pressure rating	16 bar	1.6 MPa

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

Mechanical data

Weight	[g]	1080
Housing		tubular
Dimensions	[mm]	Ø 68 / L = 43.9
Material		stainless steel (1.4404 / 316L)
Nominal diameter		DN15 (1/2")
Sensor connection		ifm-specific device flange
Process connection		Clamp DIN 32676 series C (ASME BPE)

E40610



Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN15

Process connection suitable for pipe standard	(DIN EN 10357 series C); (DIN 11866 series C)
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm
Accessories	
Items supplied	screws 8
Remarks	
Pack quantity	2 pcs.