




Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN40

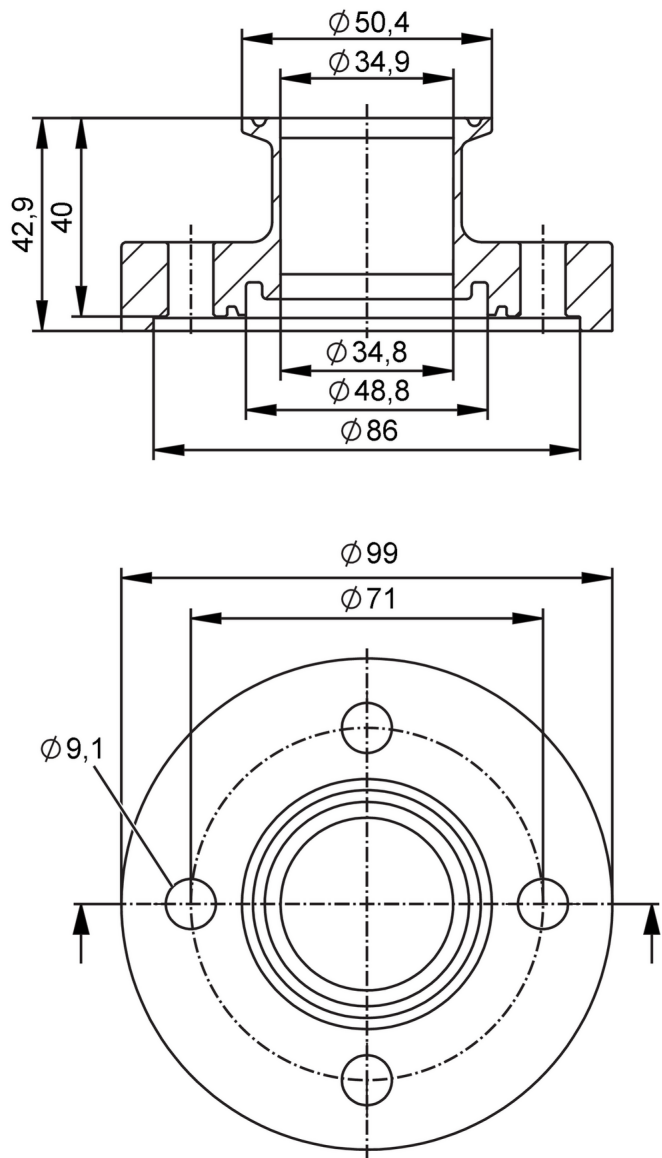

EC 1935/2004

FCM



Hygienic
Cleanable

Application

Design

for flow meter SMF

Application

food and beverage industry; hygienic systems

Pressure rating

16 bar

1.6 MPa

Tests / approvals

Pressure equipment directive

A possible classification to PED depends on the application and has to be carried out by the user / operator.

Safety instructions

The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight

[g]

2399.4

Housing

tubular

Dimensions

[mm]

Ø 99 / L = 42.9

E40612



Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN40

Material	stainless steel (1.4404 / 316L)
Nominal diameter	DN40 (1 1/2")
Sensor connection	ifm-specific device flange
Process connection	Clamp DIN 32676 series C (ASME BPE)
Process connection suitable for pipe standard	(DIN EN 10357 series C); (DIN 11866 series C); (BS 4825 Part 1); (ISO 2037)
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm
Accessories	
Items supplied	screws 8
Remarks	
Pack quantity	2 pcs.