




Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN50

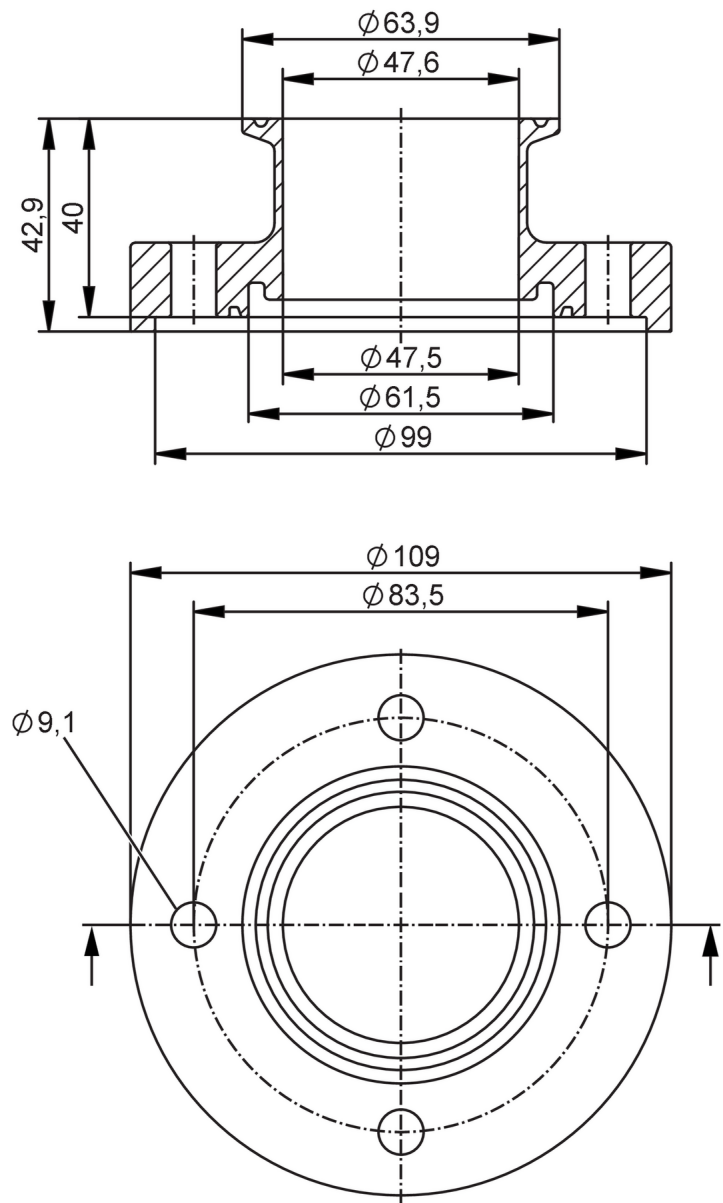

Application

Design	for flow meter SMF	
Application	food and beverage industry; hygienic systems	
Pressure rating	16 bar	1.6 MPa

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

Mechanical data

Weight	[g]	2611.2
Housing	tubular	

E40613



Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN50

Dimensions	[mm]	Ø 109 / L = 42.9
Material		stainless steel (1.4404 / 316L)
Nominal diameter		DN50 (2")
Sensor connection		ifm-specific device flange
Process connection		Clamp DIN 32676 series C (ASME BPE)
Process connection suitable for pipe standard		(DIN EN 10357 series C); (DIN 11866 series C); (BS 4825 Part 1)
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.4 µm
Accessories		
Items supplied		screws 8
Remarks		
Pack quantity		2 pcs.