


E40614



Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN65

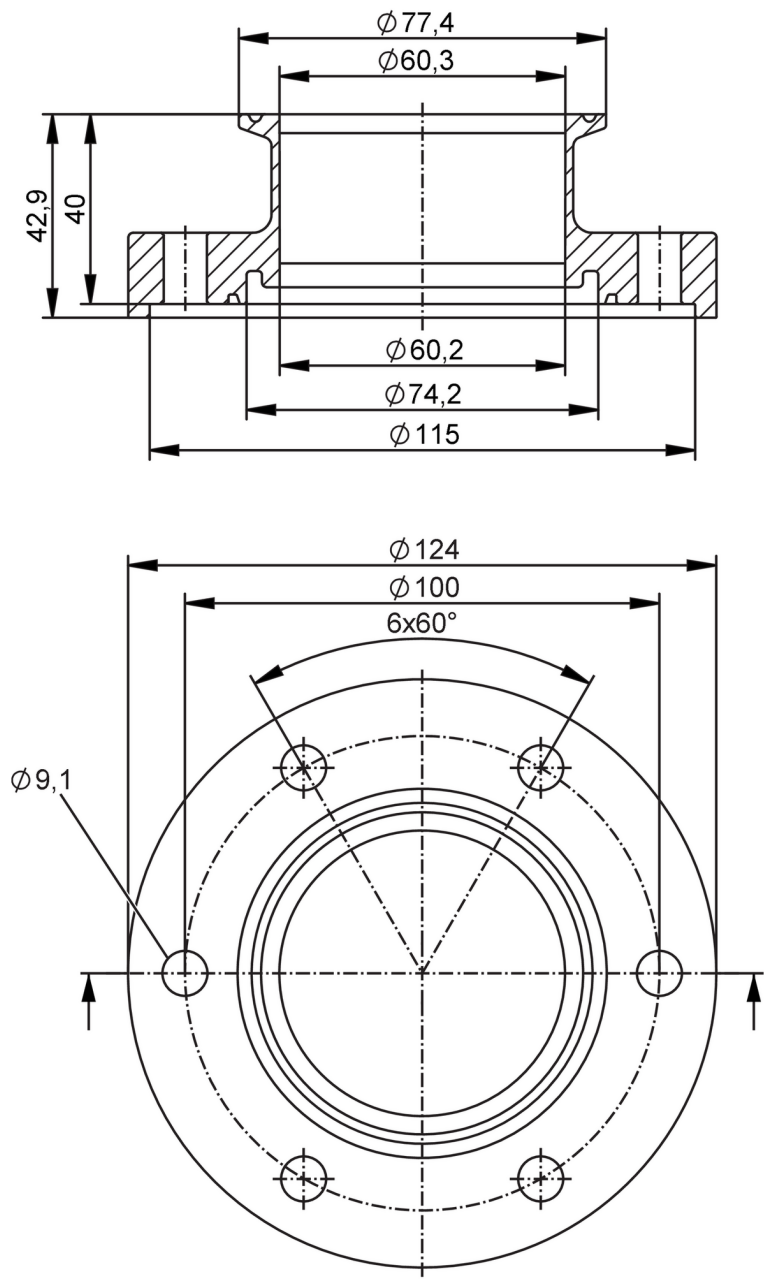

EC 1935/2004

FCM



Hygienic
Cleanable

Application

Design

for flow meter SMF

Application

food and beverage industry; hygienic systems

Pressure rating

16 bar

1.6 MPa

Tests / approvals

Pressure equipment directive

A possible classification to PED depends on the application and has to be carried out by the user / operator.

Safety instructions

The compatibility between medium and product material has to be checked in all applications.



Process adapters clamp DIN 32676 series C (ASME BPE)

ADAPT DIN32676-C DN65

Mechanical data		
Weight	[g]	3488.2
Housing		tubular
Dimensions	[mm]	Ø 124 / L = 42.9
Material		stainless steel (1.4404 / 316L)
Nominal diameter		DN65 (2 1/2")
Sensor connection		ifm-specific device flange
Process connection		Clamp DIN 32676 series C (ASME BPE)
Process connection suitable for pipe standard		(DIN EN 10357 series C); (DIN EN 10357 series D); (DIN 11866 series C); (BS 4825 Part 1); (ISO 2037)
Surface characteristics Ra/Rz of the wetted parts		Ra < 0.4 µm
Accessories		
Items supplied		screws 12
Remarks		
Pack quantity		2 pcs.