


E43332




Connection cable
CABLE CAN ADAPTER

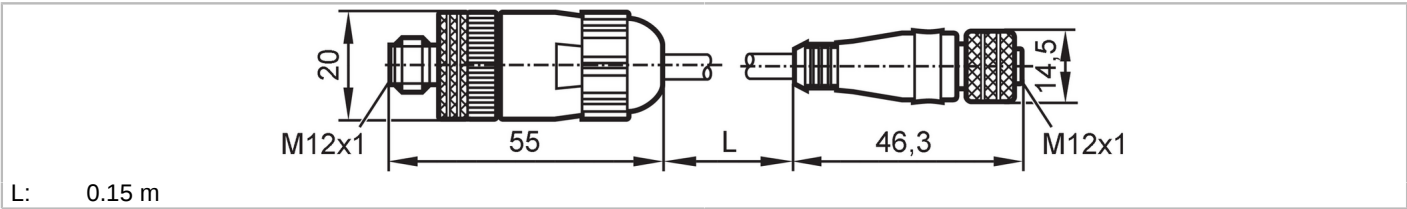

Application	
Special feature	gold-plated contacts
Design	CAN adapter cable
Application	Use in mobile and harsh applications
Electrical data	
Operating voltage [V]	< 30 AC / < 36 DC
Max. current load total [A]	4
Operating conditions	
Ambient temperature [°C]	-30...80
Protection	IP 68
Mechanical data	
Weight [g]	48.2
Dimensions [mm]	20 x 20 x 55
Material	PUR
Molded-body material	PUR
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 5, gold-plated; Moulded body: PUR; Locking: brass, nickel-plated



Electrical connection

Cable: 0.15 m, PUR / PVC, black, Ø 6.8 mm; 4 x 0.25 mm²

Connection	
2	1 C L+
3	2 C L-
4	4 C CANH
5	3 C CANL

E43332



Connection cable

CABLE CAN ADAPTER

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Contacts: 8, gold-plated; Moulded body: PUR; Locking: brass, nickel-plated

