




Process adapter Tri-Clamp

ADAPT G1/2-DN20 DIN32676-A

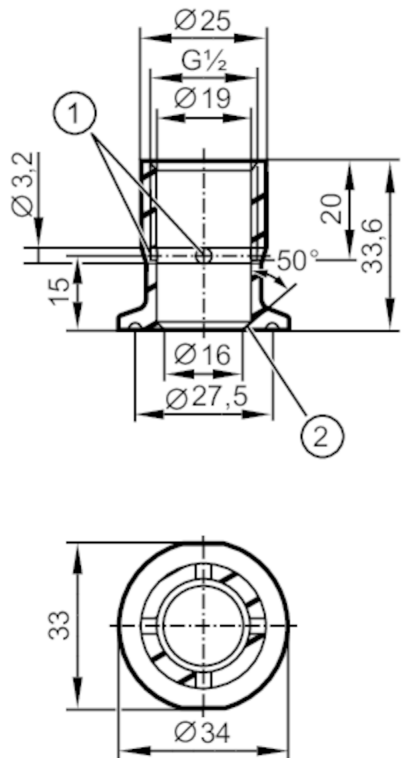

- 1 Leakage port
2 Sealing edge



EC 1935/2004 EHEDG Certified FCM FDA

Application

Design	with leakage port (3A)	
Pressure rating	25 bar	2.5 MPa
Note on pressure rating	for the connection sensor - adapter	

Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

Mechanical data

Weight	[g]	117.6
Dimensions	[mm]	Ø 34
Material	process adapter: stainless steel (1.4435 / 316L) surface characteristics: Ra < 0,4 µm / Rz 4 µm	
Sensor connection	G 1/2 sealing cone	
Process connection	Clamp DN20 DIN 32676 (ISO 2852)	
Surface characteristics Ra/Rz of the wetted parts	Ra < 0.4 µm / Rz = 4 µm	

Remarks

Pack quantity	1 pcs.
---------------	--------