


E43406



IO-Link data splitter

IO-LINK DATA SPLITTER PNP

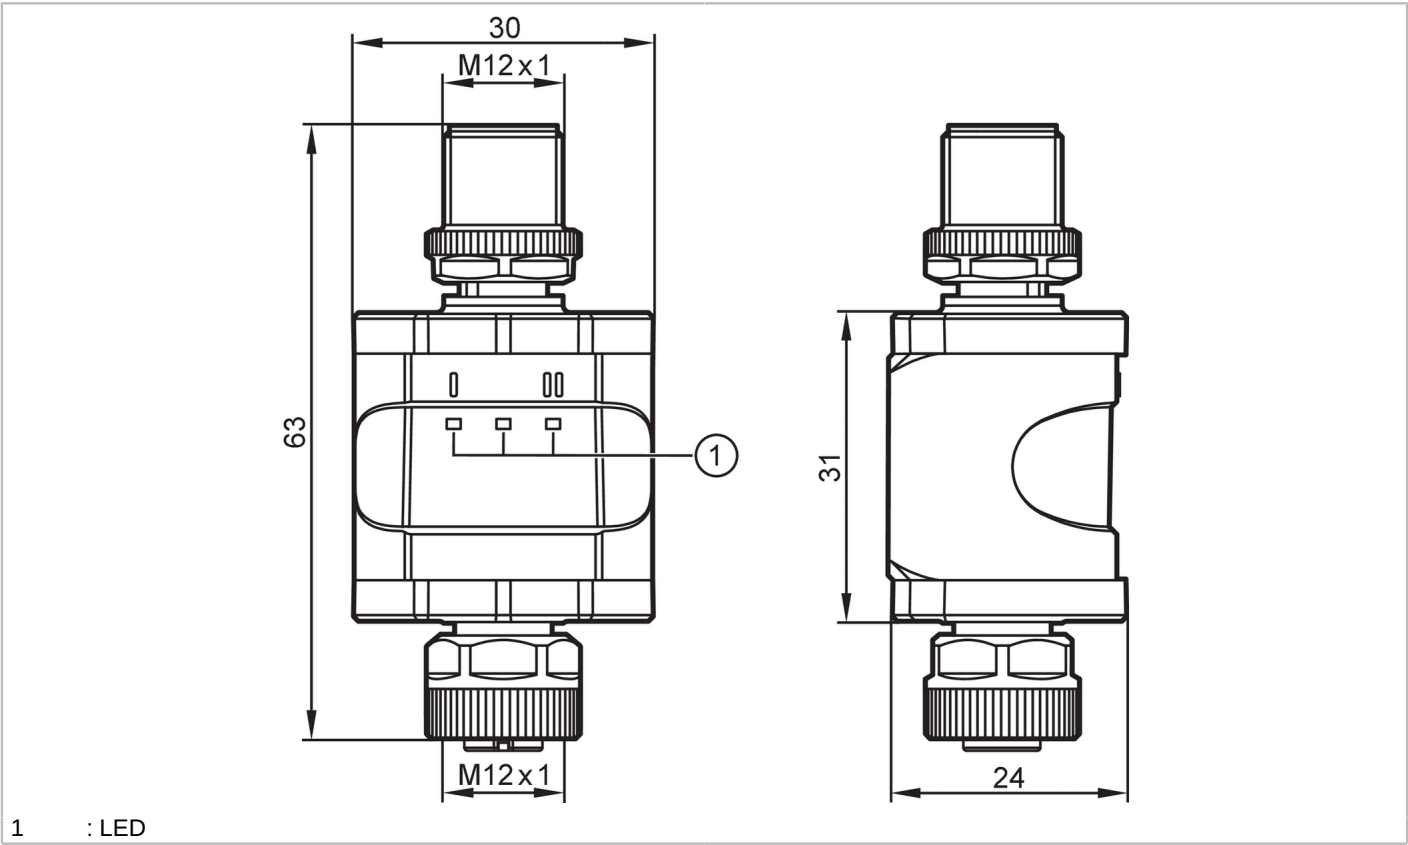

IO-Link



Product characteristics

Number of inputs and outputs	Number of digital outputs: 1
------------------------------	------------------------------

Application

Special feature	gold-plated contacts
Application	for retrofitting of existing IO-Link systems; for systems without IO-Link capabilities

Electrical data

Operating voltage	[V]	18...30 DC; (on the master side; on the controller / system: 20...30 DC)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 17; (both sides)
Protection class		III
Reverse polarity protection		yes; (on the master side)
Power-on delay time	[s]	< 2; (for communication; response time switching signal: response time device added with IO-Link process cycle time)

Inputs / outputs

Total number of inputs and outputs	1; (on the controller / system)
Number of inputs and outputs	Number of digital outputs: 1

Outputs

Output signal	switching signal; IO-Link
Electrical design	PNP
Number of digital outputs	1



IO-Link data splitter

IO-LINK DATA SPLITTER PNP

Output function	normally open / closed	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	200	
Type of short-circuit protection	yes (non-latching)	
Short-circuit proof	yes	
Overload protection	yes	

Interfaces

Communication interface	IO-Link	
Supported DeviceIDs	Type of operation	DeviceID
	IO-Link Device	1107

IO-Link Device		
Note on interfaces	connection to IO-Link Master	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
	Function	Extended identification
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	4.2	

IO-Link Master		
Note on interfaces	connection to IO-Link enabled auxiliary devices	
Unterstützte Masterportklasse	A / B	
Transmission type	COM1 (4,8 kBaud); COM2 (38,4 kBaud); COM3 (230,4 kBaud)	
IO-Link revision	1.0; 1.1	
SDCI standard	IEC 61131-9	

Operating conditions

Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-25...70	
Protection	IP 67	

Tests / approvals


EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-4	in plastic or open metal tanks
Shock resistance	DIN EN 60068-2-27	15 g (6 ms)
Vibration resistance	DIN EN 60068-2-6	2 g (10...150 Hz)
MTTF [years]	307	
UL approval	Ta	max. 55 °C
	File number UL	E205959

E43406



IO-Link data splitter

IO-LINK DATA SPLITTER PNP

Mechanical data		
Weight	[g]	90
Material	stainless steel (1.4404 / 316L); brass (2.0401); PBT; PA; sealing: FKM;	
Displays / operating elements		
Display	Switching output	1 x LED, yellow
	Power	1 x LED, green
	IO-Link	1 x LED, yellow
Accessories		
Accessory required	Y connection cable 1, EVC843	
Remarks		
Remarks	For information on the maximum cable length please refer to the operating instructions.	
	To ensure the function according to technical datasheet and operating instructions the use of the following article is imperative: EVC843	
	the device complies with overvoltage category II	
Pack quantity	1 pcs.	
Electrical connection		
Electrical connection - plug		
Connector: 1 x M12; coding: A; Contacts: 4, gold-plated		
		
1	L+	
2	NC	
3	L-	
4	C: IO-Link	
Electrical connection - Socket		
Connector: 1 x M12; coding: A; Contacts: 3, gold-plated		
		
1	L+	
2	C/Q: IO-Link Master	
3	L-	
4	OUT1: switching output or IO-Link	
5	NC	

E43406



IO-Link data splitter

IO-LINK DATA SPLITTER PNP


Electrical connection

Connection

AN_i_1895_G

Original Scale Drawing (MTD)

_G = Groß

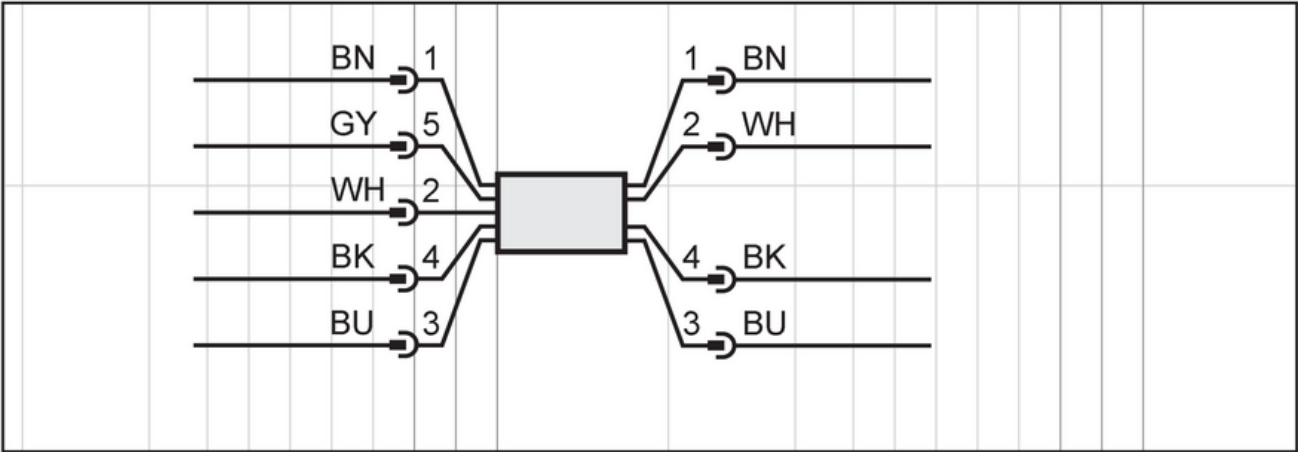

↓ 32% ↑ 312,5%

EPS Source
Product Scale Drawing
Frame Size: 75 mm x 26 mm

