


E60209



Flexible coupling for encoders

COUPLING 25-95-10-32-KV

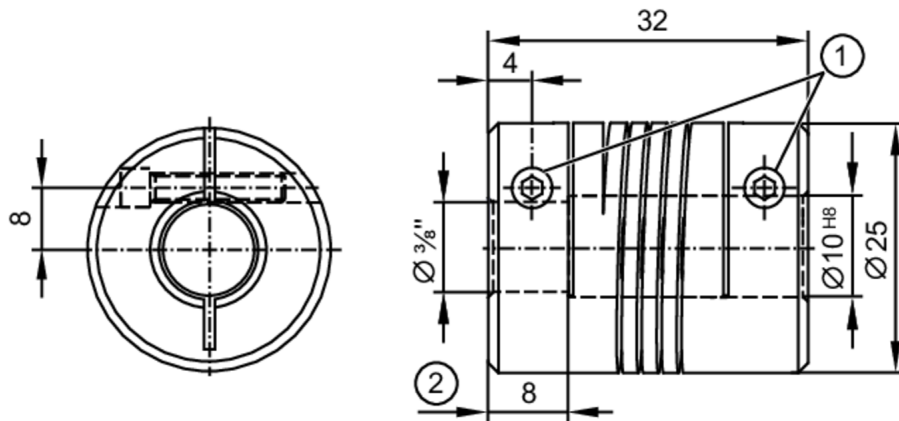

- 1 M4 x 12 - ISO 4762 (2x)
2 Depth der Klemmnabe

Mechanical data

Weight	[g]	33.4
Dimensions	[mm]	Ø 25 / L = 32
Material		aluminum
Tightening torque	[Nm]	tightening torque screws: 120 Ncm
External diameter D	[mm]	25
Inside diameter 1	[mm]	10
Inside diameter 2	[mm]	9,525
Depth of the clamping hub	[mm]	8
Clamping screw	[mm]	M4 x 12 - ISO 4762 (2x)
Length	[mm]	32
Max. revolution, mechanical [U/min]		6000
Max. axial shaft misalignment [mm]		± 0,5
Max. radial shaft misalignment [mm]		± 0,35
Max. angular displacement [°]		± 4,0

Remarks

Remarks	The data indicated apply to couplings with the above hub borings at an ambient temperature of 23 °C. The values of radial, angular and axial displacement are maximum values which must not reach their maximum simultaneously while in operation.
Pack quantity	1 pcs.