


E70350




Patchcords with valve plug

VSTGH050MSS0002B03VDAA041--S

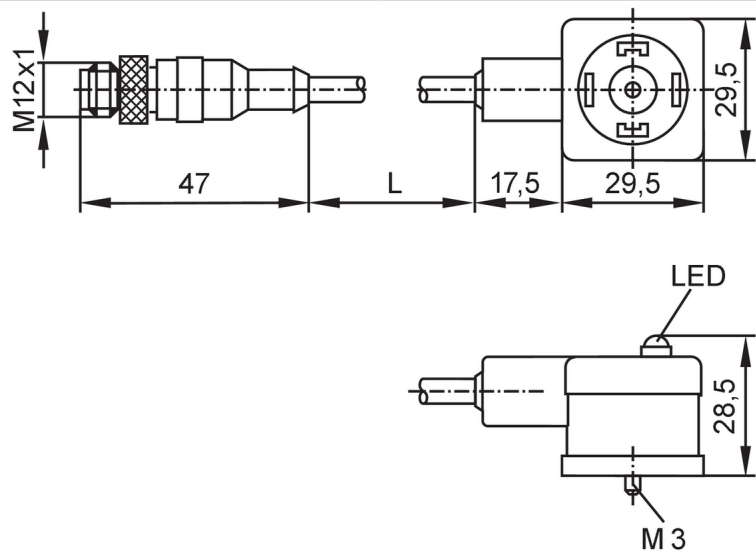

Application		
Special feature	Free from silicone; Halogen-free; gold-plated contacts	
Application	Industrial applications	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 24 AC/DC
Overvoltage protection	free-wheeling diode	
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection	IP 67	
Mechanical data		
Weight	[g]	138.8
Material	housing: TPU (urethane)	
Molded-body material	TPU (urethane)	
Material nut	brass, nickel-plated	
Displays / operating elements		
Display	Power	1 x LED, green
Accessories		
Items supplied	screw: 1	
	panel for labelling: 1	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - plug		

Connector: 1 x M12, straight; coding: A; Contacts: 3, gold-plated; Moulded body: TPU (urethane); Locking: brass, nickel-plated



E70350




Patchcords with valve plug

VSTGH050MSS0002B03VDAA041--S

Electrical connection

Cable: 2 m, PUR / PVC, Halogen-free; 3 x 0.5 mm² (42 x Ø 0.1 mm)

Connection

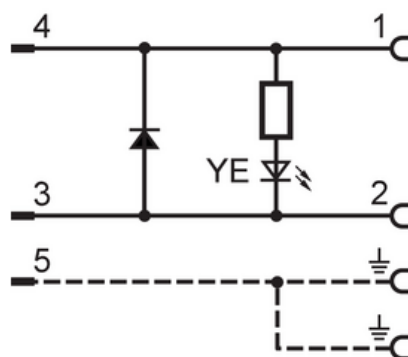

Electrical connection - Socket

Connector: 1 x valve type A DIN (EN 175301-803), angled; Contacts: 4, nickel-plated brass; Moulded body: TPU (urethane);
Locking: brass, nickel-plated

