


E74220



AS-Interface flat cable

Flat cable 100 meter TPE red

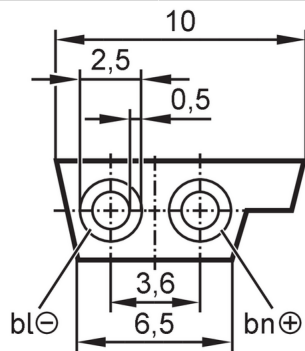

Application

Special feature	Drag chain suitability
Application	Industrial applications

Electrical data

Operating voltage	[V]	230 DC; (Peak voltage 300 V)
-------------------	-----	------------------------------

Operating conditions

Ambient temperature	[°C]	-40...105
Ambient temperature (moving)	[°C]	-30...105

Tests / approvals

UL approval	AWM style	2103
	File number UL	E130266
CSA approval	File Nummer	LL55255-42

Mechanical data

Weight	[g]	6960
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	75 mm
	Travel speed	max. 4 m/s at 10 m horizontal travel length and max. acceleration of 4 m/s ²
	Bending cycles	≥ 10 Mio
	Torsional strain	360°/m

Remarks

Remarks	100 m form supplied: coiled
Pack quantity	100 m

Electrical connection

Cable: 100 m, TPE, red; 2 x 1.5 mm²