


E75228



Push-in L-fitting for pneumatic connections

AirBox push-in L-connect 10pcs

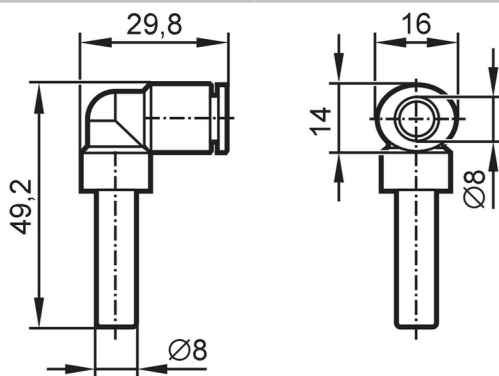

Application

Media compressed air according to ISO 8573-1: 2001

Operating conditions

Operating pressure	[bar]	10; (min. -0,95)
Ambient temperature	[°C]	-20...80
Storage temperature	[°C]	-20...80

Mechanical data

Weight	[g]	69.5
Material	housing: Nickel-plated brass / PA66; release ring: polyoxymethylene; tooth lock washer: stainless steel; form ring: NBR	
Tube fittings		8 mm
Sleeve diameter	[mm]	8

Remarks

Pack quantity 10 pcs.