


E79995



AS-Interface flat cable insulation displacement connector

FC connector PVC V2A 2m

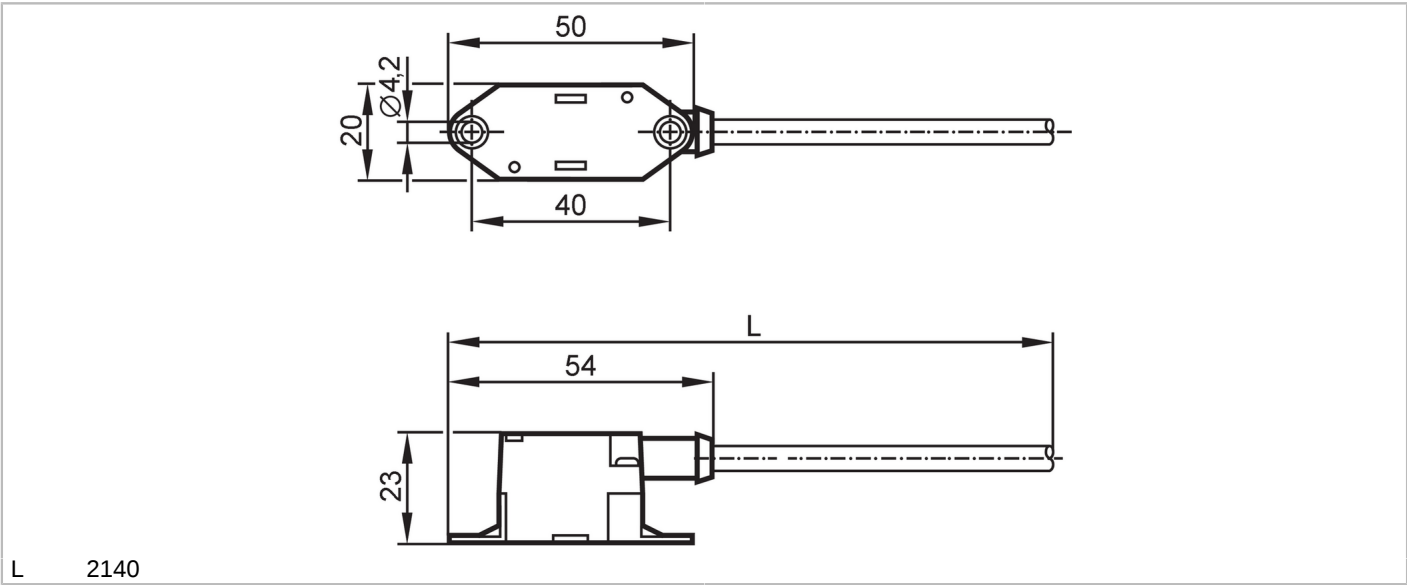

Application		
Design	AS-i	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current load total	[A]	2
Operating conditions		
Ambient temperature	[°C]	-20...70
Protection	IP 67	
Mechanical data		
Weight	[g]	97.4
Material	housing Upper part: PUR; housing lower part: PA 6.6; screw: stainless steel (1.4305 / 303)	
Remarks		
Remarks	The flat cable should not end in the splitter. Use a flat cable seal or heat-shrink cap for sealing.	
Pack quantity	1 pcs.	
Electrical connection		
Cable: 2 m, PVC, Ø 5.75 mm; 2 x 0.75 mm², PVC		
Connection		
AS-i BN: AS-i + BU: AS-i - + -		
brown	AS-i +	
blue	AS-i -	