




RFID tag

ID-TAG/M5x16,5/06

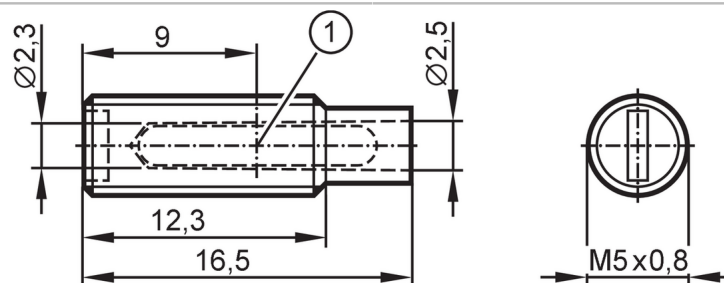

1 middle of the tag



Application

Application	Coding of workpiece carriers in routing conveyors
Operating temperature (active) [°C]	-25...85
Peak temperature (passive) [°C]	90

Electrical data

Operating frequency [MHz]	13,56
Memory size [bit]	896
Memory type	EEPROM
Chip type	Vigo
Number of the blocks	28
Block size [Byte]	4
Unique Identification Number (UID) [Byte]	8
RFID standard	ISO 15693
Max. read cycles	unlimited
Max. write cycles	100000

Operating conditions

Ambient temperature [°C]	-25...85
Storage temperature [°C]	-40...90
Protection	IP 67

Tests / approvals

Shock resistance	DIN IEC 68-2-29	30 g 18 ms
Vibration resistance	DIN IEC 68-2-6	6 g 14...200 Hz
Radio approval	ISO 15693	

Mechanical data

Weight [g]	5.3
Housing	Threaded type
Type of mounting	installation on non-metal materials; (screw fastening ; sticking to a surface)
Dimensions [mm]	M5 / L = 16.5
Thread designation	M5
Material	PA black

Remarks

Pack quantity	10 pcs.
---------------	---------

E80347



RFID tag

ID-TAG/M5x16,5/06

Other data

Reading distance when mounted on non-metal (mm)

ANT410 / DTI110 / DTI410	-
ANT411 / DTI111 / DTI411	5
ANT420 / DTI120 / DTI420 / DTI124 / DTI424 / DTM424 / DTM426	-
ANT421 / DTI121 / DTI421 /DTI125 / DTI425 / DTM425 / DTM427	10
ANT430 / DTI130 / DTI430 / DTI134 / DTI434 / DTM434 / DTM436	5
ANT431 / DTI131 / DTI431 / DTI135 / DTI435 / DTM435 / DTM437	15
ANT513 / DTI213 / DTI513 / DTC510	25
ANT515 / DTI215 / DTI515 / ANT516 / DTI216 / DTI516	5
ANT600 / DTI600	15