


E80380



RFID tag

ID-TAG/30X2,8/03 - 64 Kbit

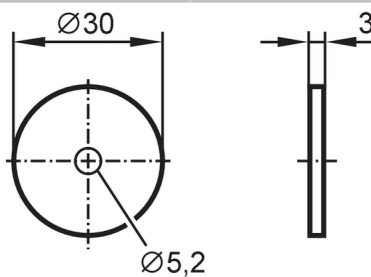

Application

Operating temperature (active)	[°C]	-25...85
Peak temperature (passive)	[°C]	90

Electrical data

Operating frequency	[MHz]	13,56
Memory size	[bit]	65536
Memory type		FRAM
Chip type		MB89R112
Number of the blocks		256
Block size	[Byte]	32
Unique Identification Number (UID)	[Byte]	8
RFID standard		ISO 15693
Max. read cycles		unlimited
Max. write cycles		unlimited

Operating conditions

Ambient temperature	[°C]	-25...85
Storage temperature	[°C]	-40...90
Protection		IP 68; IP 69K

Tests / approvals

Radio approval	ISO 15693
----------------	-----------

Mechanical data

Weight	[g]	3.85
Type of mounting	installation on non-metal materials; (screw fastening ; sticking to a surface)	
Dimensions	[mm]	Ø 30 / L = 3
Material	PPA [ISO 1874: PA6T/6I-GF50]	

Remarks

Pack quantity	1 pcs.
---------------	--------

E80380



RFID tag

ID-TAG/30X2,8/03 - 64 Kbit

Other data

Reading distance when mounted on non-metal (mm)

ANT410 / DTI110 / DTI410	15
ANT411 / DTI111 / DTI411	20
ANT420 / DTI120 / DTI420 / DTI124 / DTI424 / DTM424 / DTM426	10
ANT421 / DTI121 / DTI421 / DTI125 / DTI425 / DTM425 / DTM427	30
ANT430 / DTI130 / DTI430 / DTI134 / DTI434 / DTM434 / DTM436	25
ANT431 / DTI131 / DTI431 / DTI135 / DTI435 / DTM435 / DTM437	40
ANT513 / DTI213 / DTI513 / DTC510	65
ANT515 / DTI215 / DTI515 / ANT516 / DTI216 / DTI516	30
ANT600 / DTI600	115