


E80382



RFID tag

ID-TAG/Label 65X30/03 - 896 bit

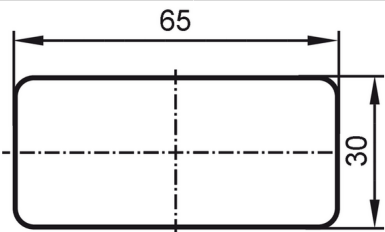

Application		
Operating temperature (active)	[°C]	-40...85
Peak temperature (passive)	[°C]	50
Electrical data		
Operating frequency	[MHz]	13,56
Memory size	[bit]	896
Memory type		EEPROM
Chip type		ICODE SLIX
Number of the blocks		28
Block size	[Byte]	4
Unique Identification Number (UID)	[Byte]	8
RFID standard		ISO 15693
Max. read cycles		unlimited
Max. write cycles		100000
Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-20...50
Tests / approvals		
Radio approval		ISO 15693
Mechanical data		
Weight	[g]	514
Type of mounting		installation on non-metal materials; (self-adhesive)
Dimensions	[mm]	30 x 65 x 0.1
Material		PP; adhesive: HL2
Remarks		
Pack quantity		500 pcs.

E80382



RFID tag

ID-TAG/Label 65X30/03 - 896 bit

Other data

Reading distance when mounted on non-metal (mm)

ANT410 / DTI110 / DTI410	15
ANT411 / DTI111 / DTI411	24
ANT420 / DTI120 / DTI420 / DTI124 / DTI424 / DTM424 / DTM426	10
ANT421 / DTI121 / DTI421 / DTI125 / DTI425 / DTM425 / DTM427	40
ANT430 / DTI130 / DTI430 / DTI134 / DTI434 / DTM434 / DTM436	30
ANT431 / DTI131 / DTI431 / DTI135 / DTI435 / DTM435 / DTM437	50
ANT513 / DTI213 / DTI513 / DTC510	65
ANT515 / DTI215 / DTI515 / ANT516 / DTI216 / DTI516	35
ANT600 / DTI600	130