




Wiring block

ZDO4H055MSS0000-00STAK120MSS

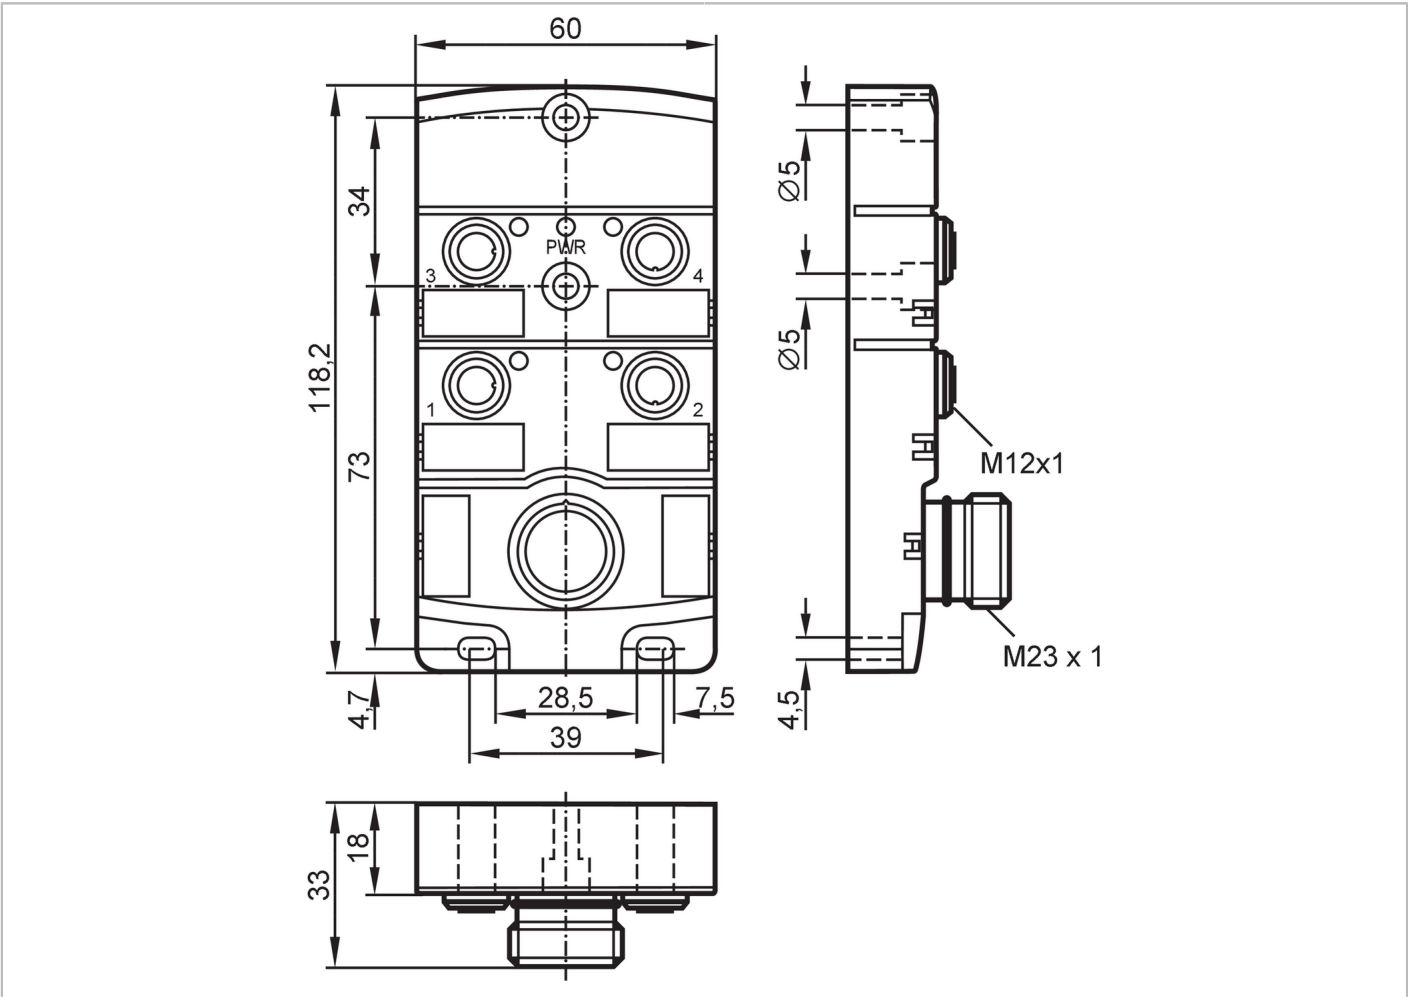

Application		
Special feature		Free from silicone; gold-plated contacts
Application		Industrial applications; Oils and coolants
Free from silicone		yes
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10
Outputs		
Electrical design		PNP
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
UL approval	Enclosure type	Type 1



Wiring block

ZDO4H055MSS0000-00STAK120MSS

Mechanical data		
Weight	[g]	224.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	118.2 x 60 x 33
Material		housing: PA
Number of ports splitter box		4
Connector type		M12


Displays / operating elements		
Display	Switching status	4 x LED, yellow
	Power	1 x LED, green

Accessories	
Items supplied	Protective caps: 2
	labels: 4


Remarks	
Pack quantity	1 pcs.

Electrical connection - Connection

Connector: 1 x M23; Contacts: 12, gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

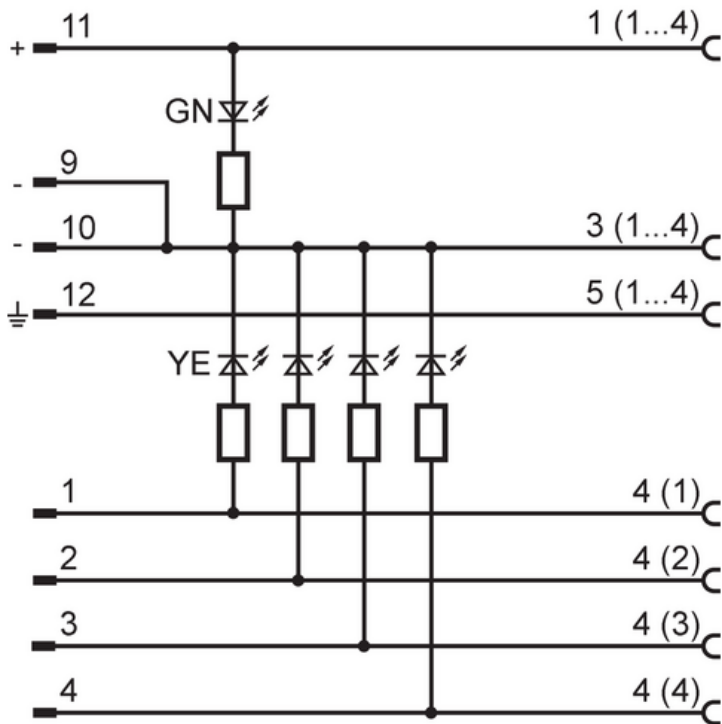

EBC002



Wiring block

ZDO4H055MSS0000-00STAK120MSS

Electrical connection - slot

Connector: 4 x M12; coding: A; Contacts: 4, gold-plated; Tightening torque: 0.8...1.5 Nm

