




Wiring block

ZDO4H050MSS0000-00STAK190MSS

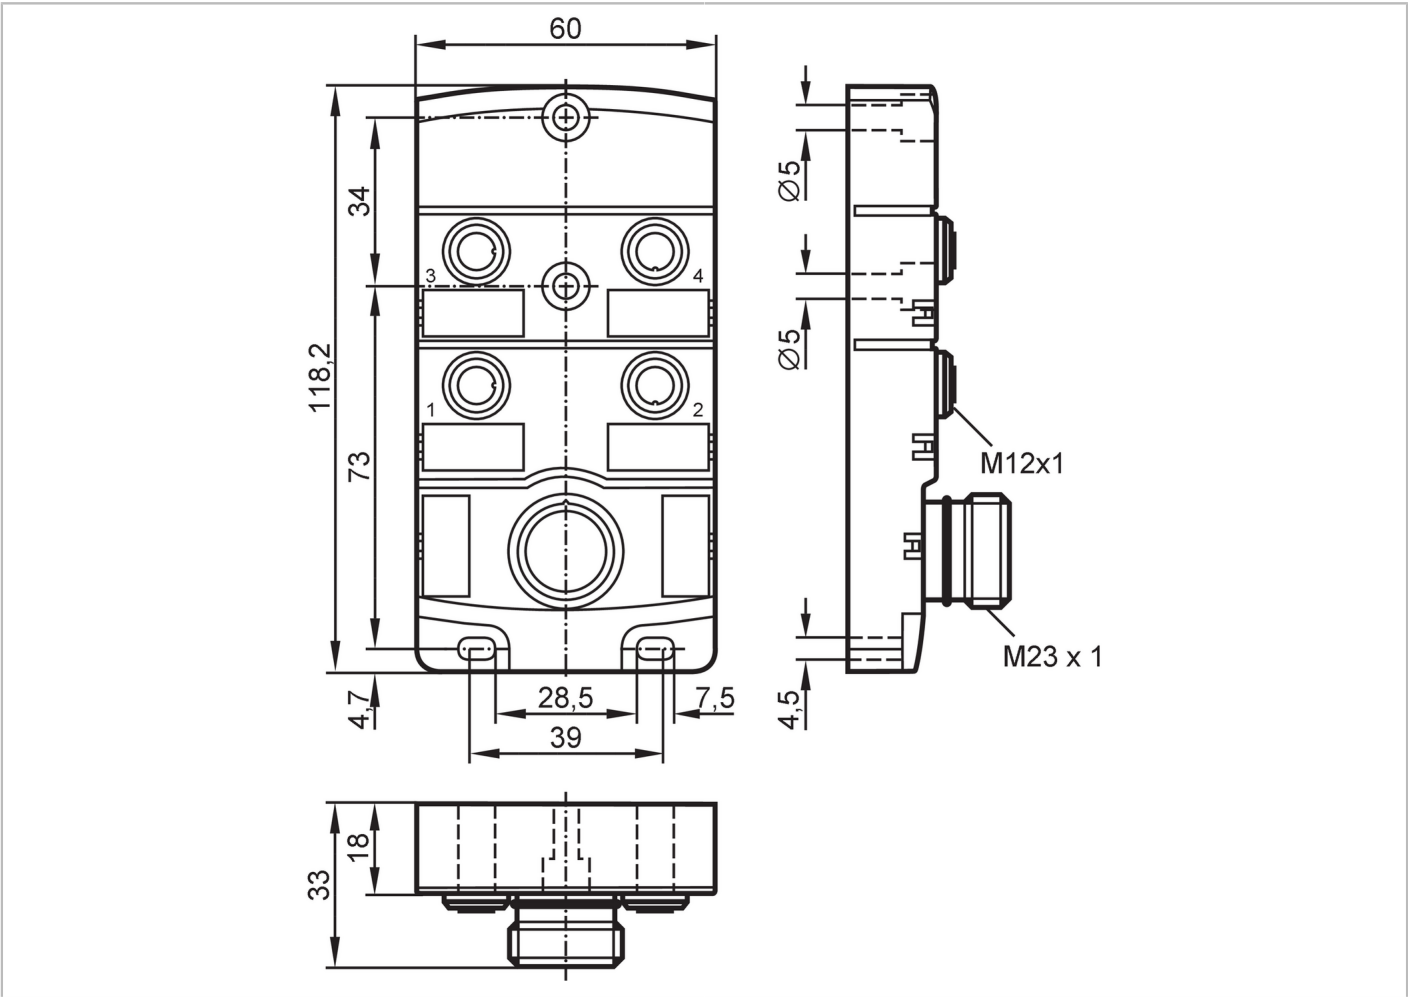

Application		
Special feature	Free from silicone; gold-plated contacts	
Application	Industrial applications; Oils and coolants	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Tests / approvals		
UL approval	Enclosure type	Type 1
Mechanical data		
Weight	[g]	226.5
Housing	rectangular	



Wiring block

ZDO4H050MSS0000-00STAK190MSS

Type of mounting	Backplane mounting
Dimensions [mm]	118.2 x 60 x 33
Material	housing: PA
Number of ports splitter box	4
Connector type	M12

Accessories


Items supplied	Protective caps: 2
	labels: 4

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M23; Contacts: 19, gold-plated; Tightening torque: 0.8...1.5 Nm






Wiring block

ZDO4H050MSS0000-00STAK190MSS


Connection

AN_i_0697_M

Original Scale Drawing (MTD)

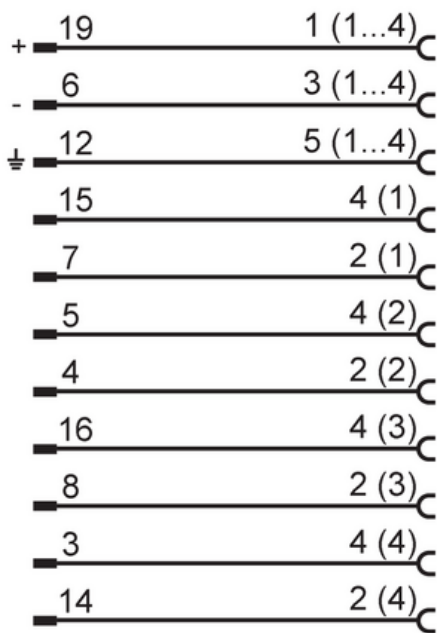

EPS Source
Product Scale Drawing
Frame Size: 36 mm x 41 mm



EBC003



Wiring block

ZDO4H050MSS0000-00STAK190MSS

Electrical connection - slot

Connector: 4 x M12; coding: A; Contacts: 5, gold-plated; Tightening torque: 0.8...1.5 Nm

