




Wiring block

ZDO6H057MSS0000-00STAK120MSS

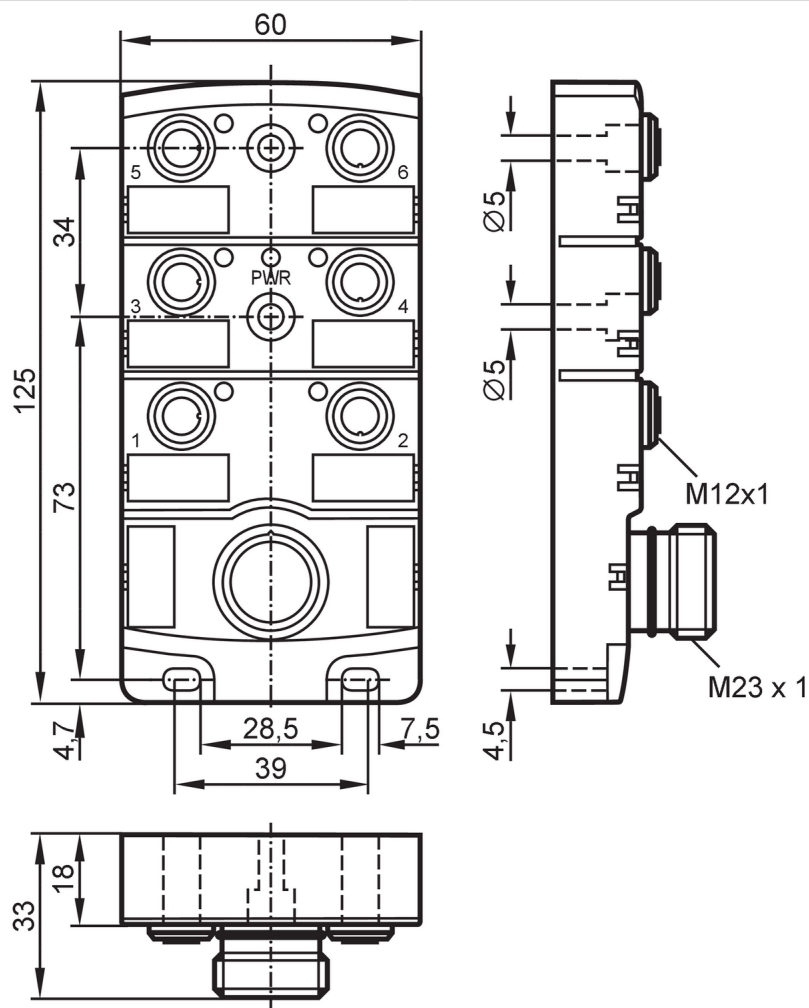

Application		
Special feature	Free from silicone; gold-plated contacts	
Application	Industrial applications; Oils and coolants	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12
Outputs		
Electrical design	PNP	
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Tests / approvals		
UL approval	Enclosure type	Type 1



Wiring block

ZDO6H057MSS0000-00STAK120MSS

Mechanical data		
Weight	[g]	240.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	125 x 60 x 33
Material		housing: PA
Number of ports splitter box		6
Connector type		M12


Displays / operating elements		
Display	Switching status	6 x LED, yellow
	Power	1 x LED, green

Accessories	
Items supplied	Protective caps: 2
	labels: 6


Remarks	
Pack quantity	1 pcs.

Electrical connection - Connection

Connector: 1 x M23; Contacts: 12, gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

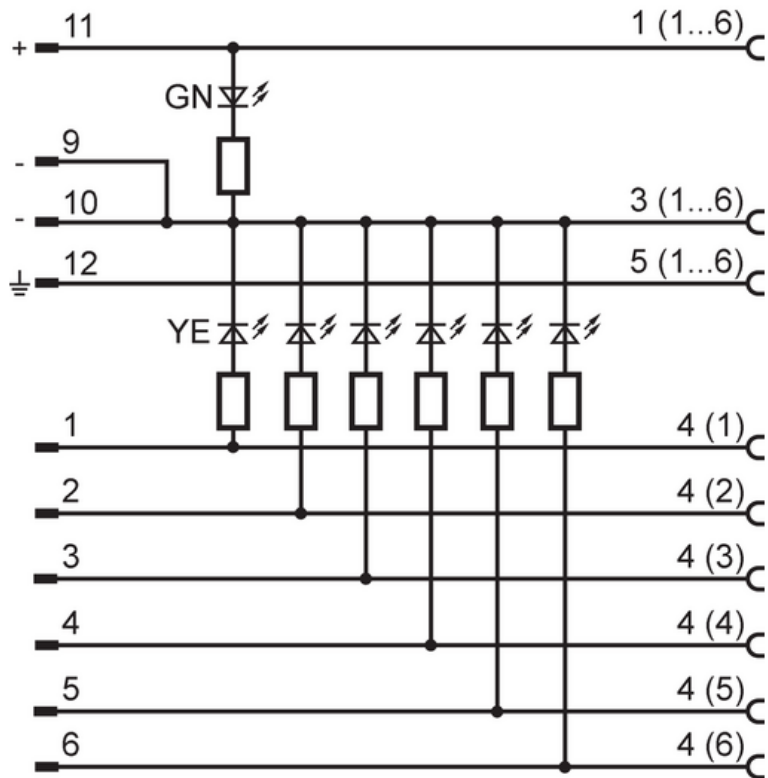

EBC006



Wiring block

ZDO6H057MSS0000-00STAK120MSS

Electrical connection - slot

Connector: 6 x M12; coding: A; Contacts: 4, gold-plated; Tightening torque: 0.8...1.5 Nm

