




Wiring block

ZDO6H050MSS0000-00STAK190MSS

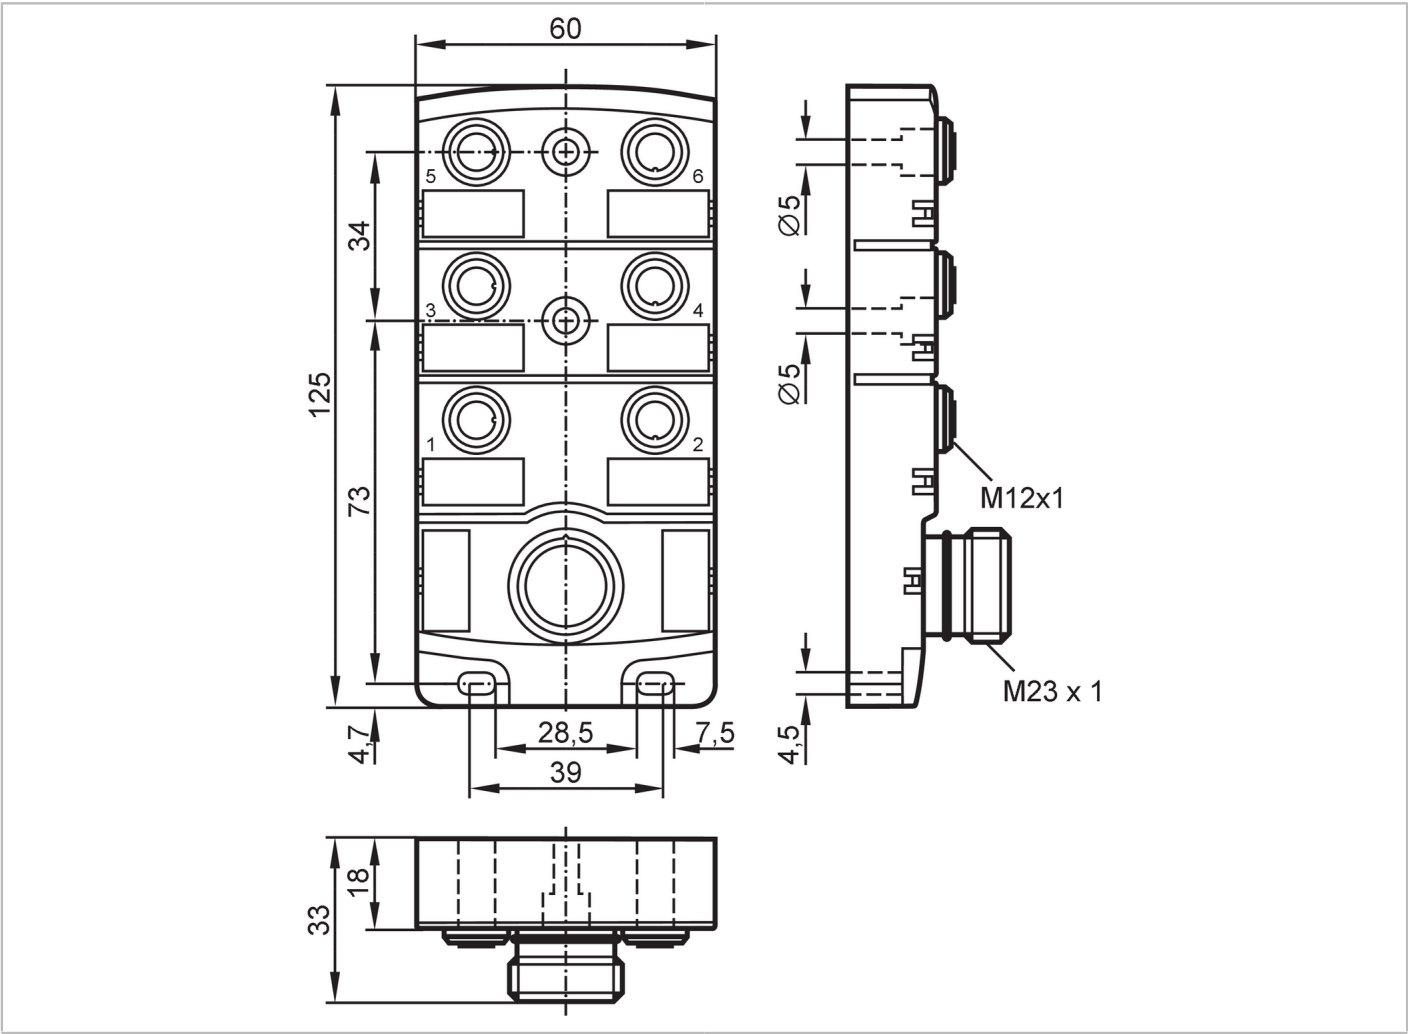

Application		
Special feature	Free from silicone; gold-plated contacts	
Application	Industrial applications; Oils and coolants	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Tests / approvals		
UL approval	Enclosure type	Type 1
Mechanical data		
Weight	[g]	252.5
Housing	rectangular	



Wiring block

ZDO6H050MSS0000-00STAK190MSS

Type of mounting	Backplane mounting
Dimensions [mm]	125 x 60 x 33
Material	housing: PA
Number of ports splitter box	6
Connector type	M12

Accessories


Items supplied	Protective caps: 2
	labels: 6

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M23; Contacts: 19, gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

+	19	1 (1...6)	C
-	6	3 (1...6)	C
±	12	5 (1...6)	C
	15	4 (1)	C
	7	2 (1)	C
	5	4 (2)	C
	4	2 (2)	C
	16	4 (3)	C
	8	2 (3)	C
	3	4 (4)	C
	14	2 (4)	C
	17	4 (5)	C
	9	2 (5)	C
	2	4 (6)	C
	13	2 (6)	C

Electrical connection - slot

Connector: 6 x M12; coding: A; Contacts: 5, gold-plated; Tightening torque: 0.8...1.5 Nm

