




Wiring block

ZDO6H05DMSS0000-00STAK190MSS

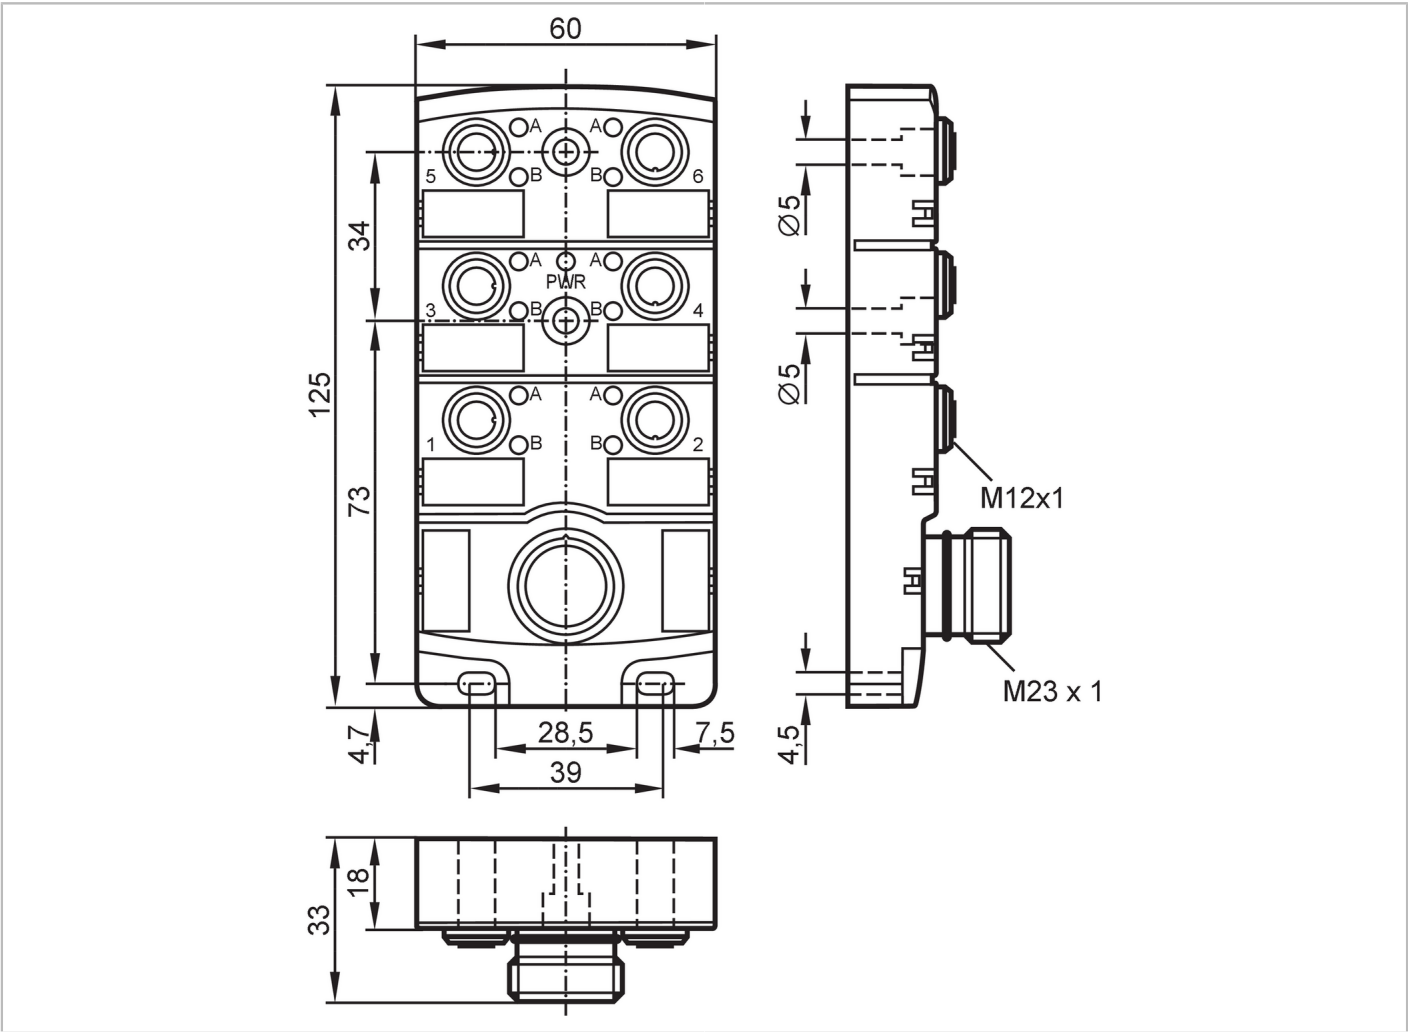


Application		
Special feature		Free from silicone; gold-plated contacts
Application		Industrial applications; Oils and coolants
Free from silicone		yes
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10
Outputs		
Electrical design		PNP
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
UL approval	Enclosure type	Type 1



Wiring block

ZDO6H05DMSS0000-00STAK190MSS


Mechanical data		
Weight	[g]	256.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	125 x 60 x 33
Material		housing: PA
Number of ports splitter box		6
Connector type		M12
Displays / operating elements		
Display	Switching status	12 x LED, yellow
	Power	1 x LED, green
Accessories		
Items supplied	Protective caps: 2	
	labels: 6	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - Connection		
Connector: 1 x M23; Contacts: 19, gold-plated; Tightening torque: 0.8...1.5 Nm		
		



Wiring block

ZDO6H05DMSS0000-00STAK190MSS

Connection

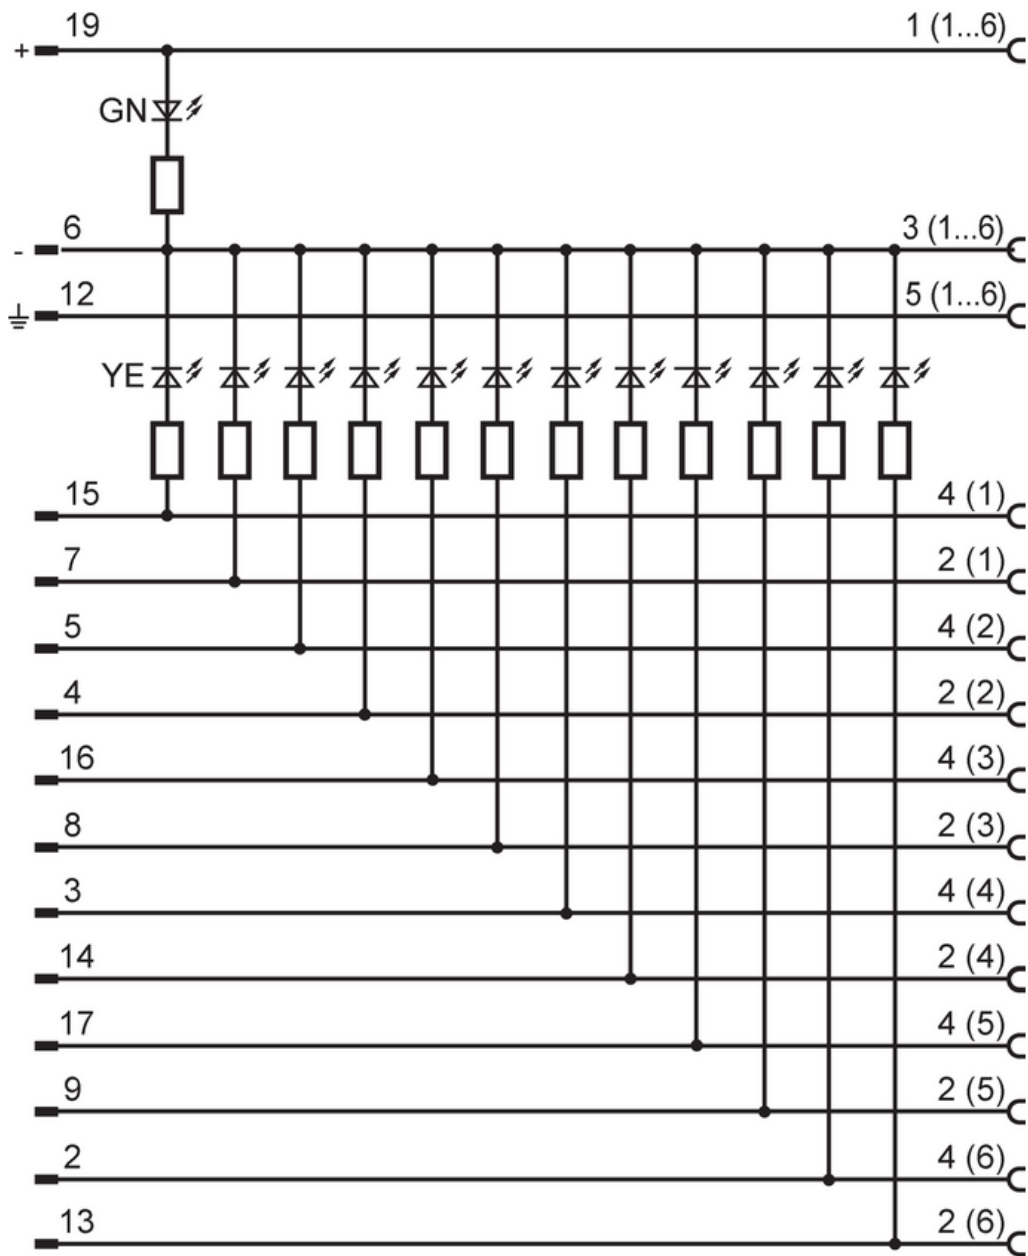

Electrical connection - slot

Connector: 6 x M12; coding: A; Contacts: 5, gold-plated; Tightening torque: 0.8...1.5 Nm

