




Wiring block

ZDO8H050MSS0000-00STAK120MSS

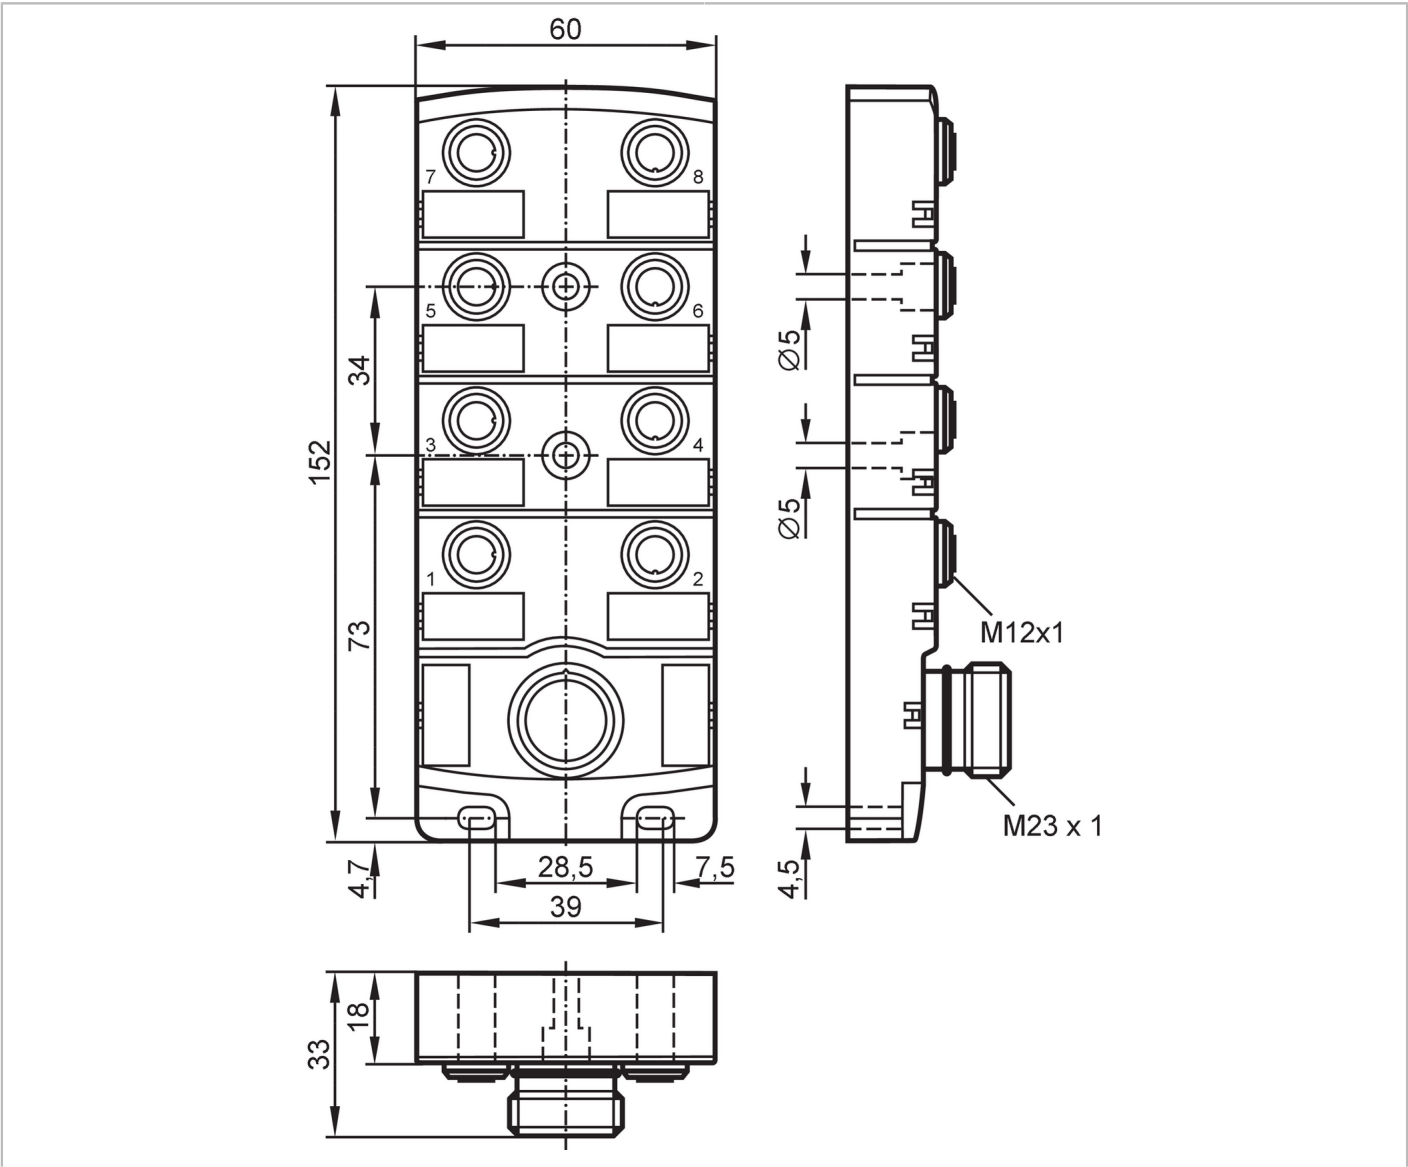

Application		
Special feature		Free from silicone; gold-plated contacts
Application		Industrial applications; Oils and coolants
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67



Wiring block

ZDO8H050MSS0000-00STAK120MSS

Tests / approvals

UL approval	Enclosure type	Type 1
-------------	----------------	--------

Mechanical data

Weight	[g]	303.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	152 x 60 x 33
Material		housing: PA
Number of ports splitter box		8
Connector type		M12

Accessories


Items supplied	Protective caps: 2
	labels: 8

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M23; Contacts: 12, gold-plated; Tightening torque: 0.8...1.5 Nm



Connection

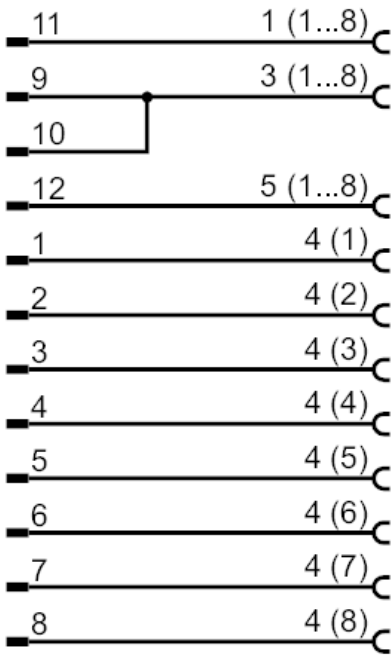

EBC009



Wiring block

ZDO8H050MSS0000-00STAK120MSS

Electrical connection - slot

Connector: 8 x M12; coding: A; Contacts: 4, gold-plated; Tightening torque: 0.8...1.5 Nm

