

ZDO8H059MSS0000-00STAK120MSS



Special feature	Free from silicone; gold-plated contacts
Application	Industrial applications; Oils and coolants
Free from silicone	yes

Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12

Electrical design	PNP
-------------------	-----

Ambient temperature	[°C]	-25...80
---------------------	------	----------

EBC010



Wiring block

ZDO8H059MSS0000-00STAK120MSS

Protection	IP 67
------------	-------

Tests / approvals

UL approval	Enclosure type	Type 1
-------------	----------------	--------

Mechanical data

Weight	[g]	304.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	152 x 60 x 33
Material		housing: PA
Number of ports splitter box		8
Connector type		M12

Displays / operating elements

Display	Switching status	8 x LED, yellow
	Power	1 x LED, green

Accessories


Items supplied	Protective caps: 2
	labels: 8

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M23; Contacts: 12, gold-plated; Tightening torque: 0.8...1.5 Nm






Wiring block

ZDO8H059MSS0000-00STAK120MSS

Connection

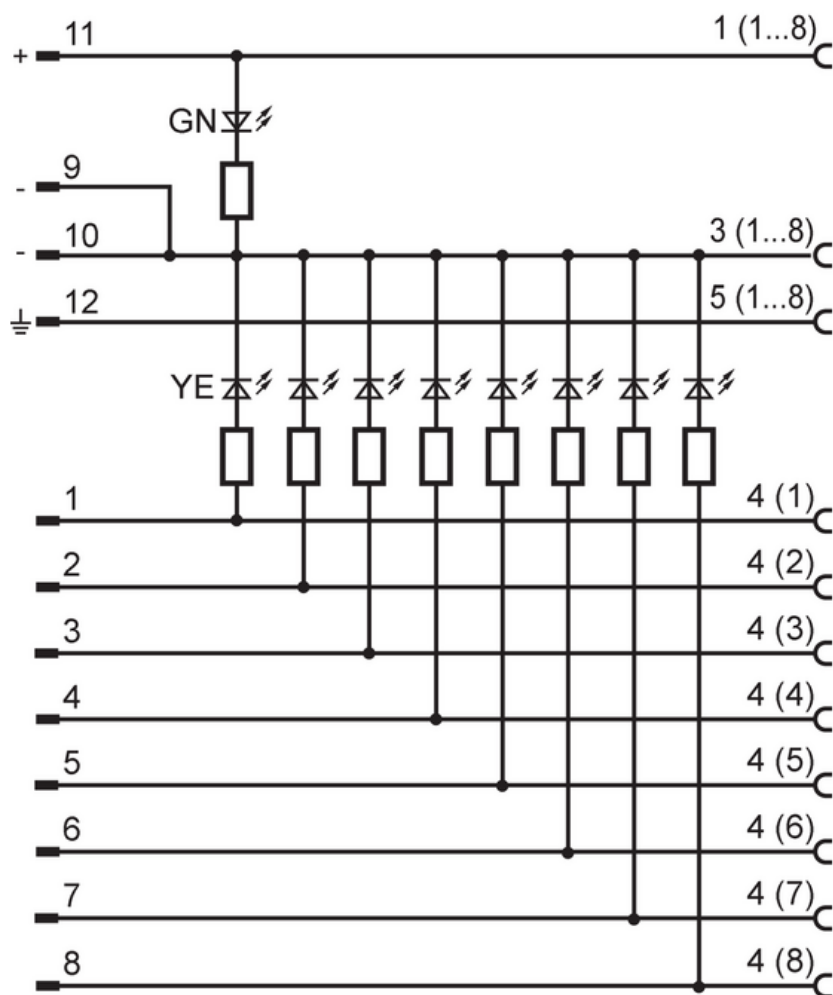

Electrical connection - slot

Connector: 8 x M12; coding: A; Contacts: 4, gold-plated; Tightening torque: 0.8...1.5 Nm

