




Wiring block

ZDO8H05HMSS0000-00STAK190MSS

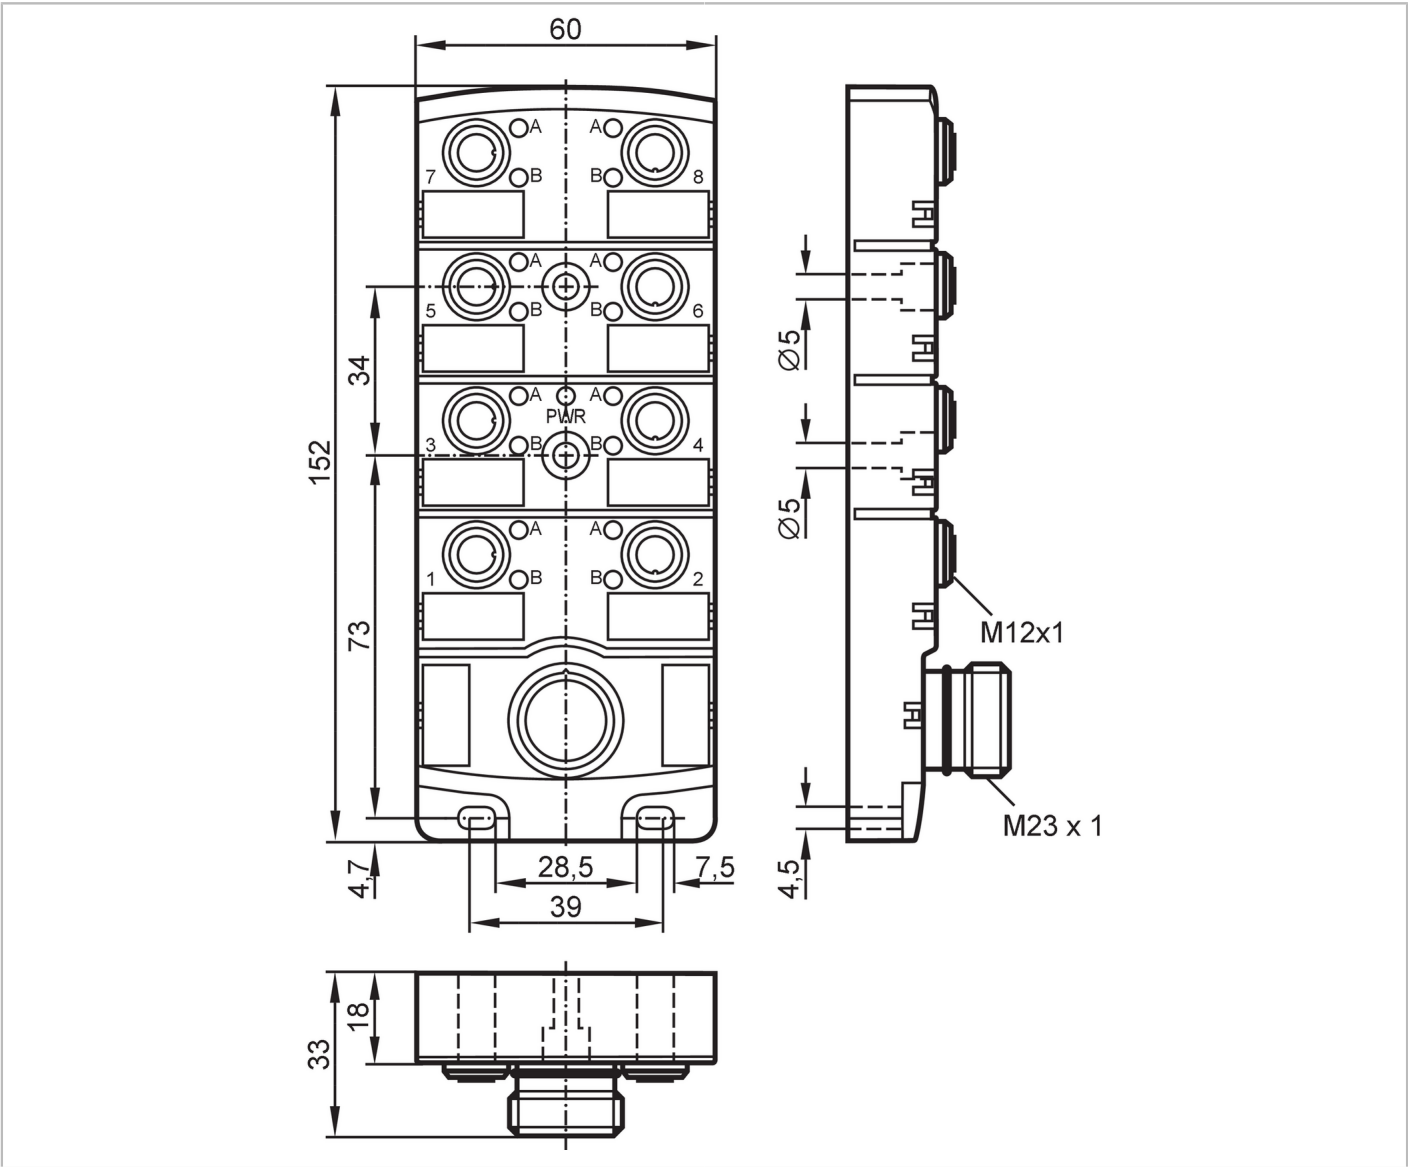

Application		
Special feature		Free from silicone; gold-plated contacts
Application		Industrial applications; Oils and coolants
Free from silicone		yes
Electrical data		
Operating voltage	[V]	10...30 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	10
Outputs		
Electrical design		PNP
Operating conditions		
Ambient temperature	[°C]	-25...80



Wiring block

ZDO8H05HMSS0000-00STAK190MSS

Protection	IP 67
------------	-------

Tests / approvals

UL approval	Enclosure type	Type 1
-------------	----------------	--------

Mechanical data

Weight	[g]	306
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	152 x 60 x 33
Material		housing: PA
Number of ports splitter box		8
Connector type		M12

Displays / operating elements

Display	Switching status	16 x LED, yellow
	Power	1 x LED, green

Accessories


Items supplied	Protective caps: 2
	labels: 8

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection


Connector: 1 x M23; Contacts: 19, gold-plated; Tightening torque: 0.8...1.5 Nm



Wiring block

ZDO8H05HMSS0000-00STAK190MSS

Connection

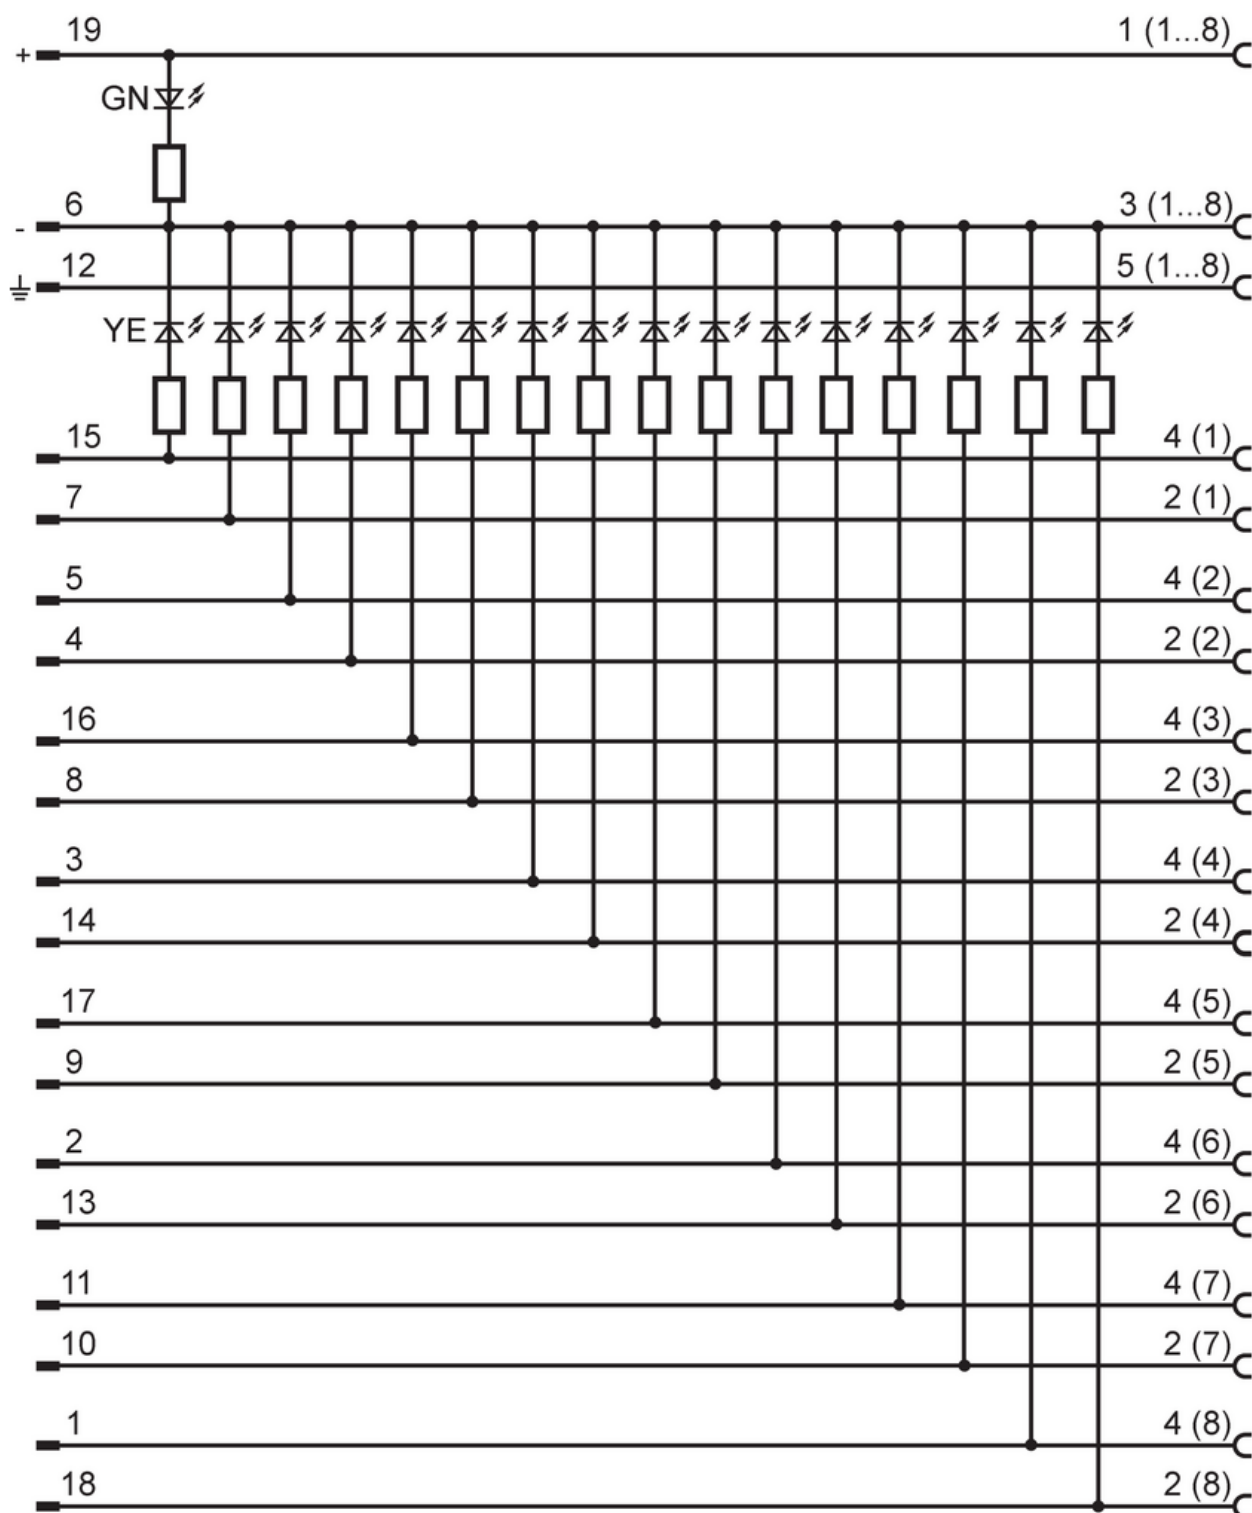

Electrical connection - slot

Connector: 8 x M12; coding: A; Contacts: 5, gold-plated; Tightening torque: 0.8...1.5 Nm

