




Wiring block

ZDO8F039MSS0000---STGH120MSS

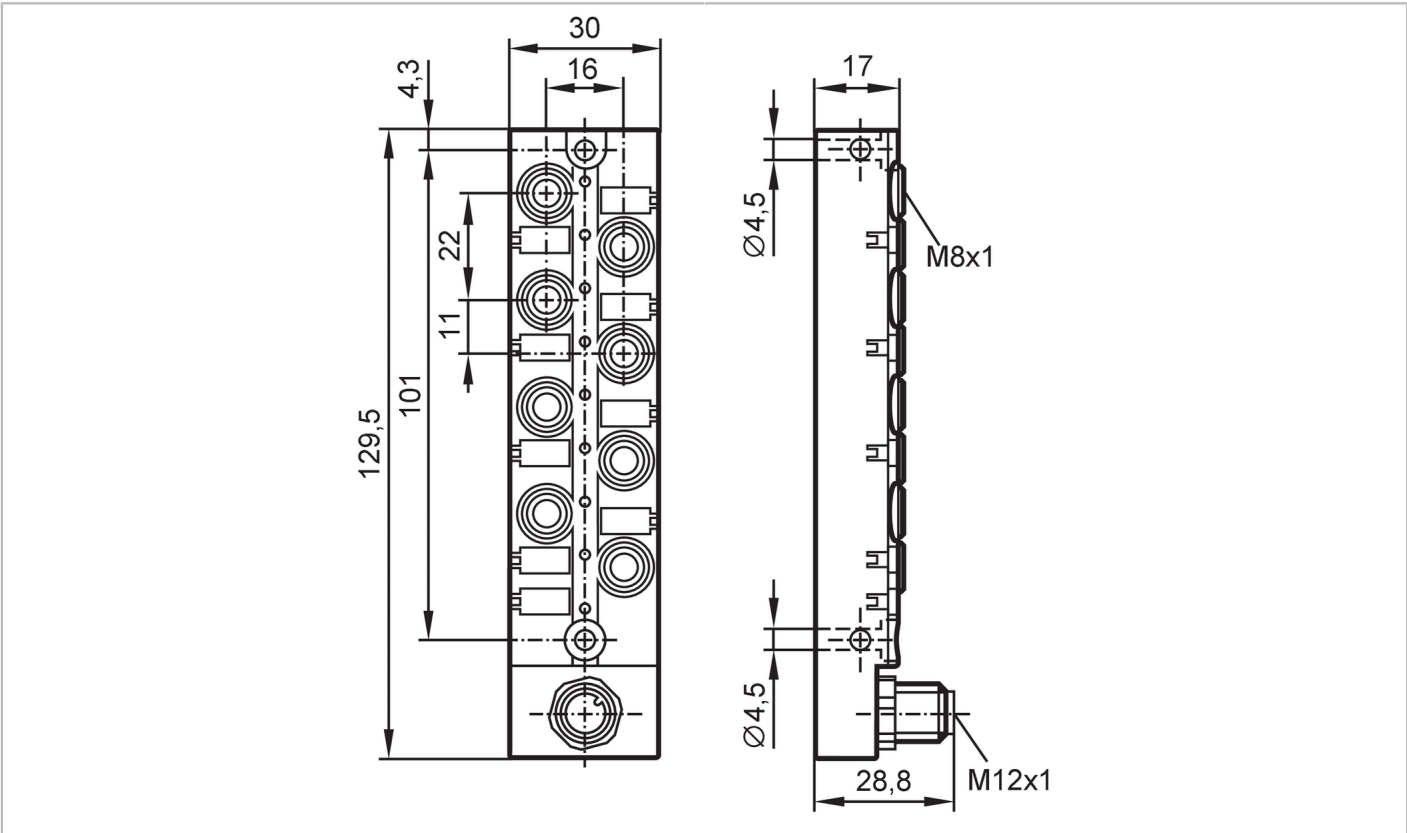

Application		
Special feature		gold-plated contacts
Application		Industrial applications; Oils and coolants
Electrical data		
Operating voltage	[V]	10...30 DC
Protection class		III
Max. current load per module/slot	[A]	2
Max. current load total	[A]	2
Outputs		
Electrical design		PNP
Operating conditions		
Ambient temperature	[°C]	-25...80
Ambient temperature (moving)	[°C]	-5...60
Protection		IP 65; IP 67; IP 68; (1 m / 7 days)
Mechanical data		
Weight	[g]	128.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	129.5 x 30 x 28.8
Material		housing: PBT-GF20



Wiring block

ZD08F039MSS0000---STGH120MSS

Material nut	brass, nickel-plated
Number of ports splitter box	8
Connector type	M8

Displays / operating elements

Display	Switching status	8 x LED, yellow
	Power	1 x LED, green

Accessories


Accessories (optional)	Protective cap: M8, E73005
------------------------	----------------------------

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection - Connection

Connector: 1 x M12; Contacts: 12, gold-plated; Locking: brass, nickel-plated; Tightening torque: 0.8...1.5 Nm



Connection

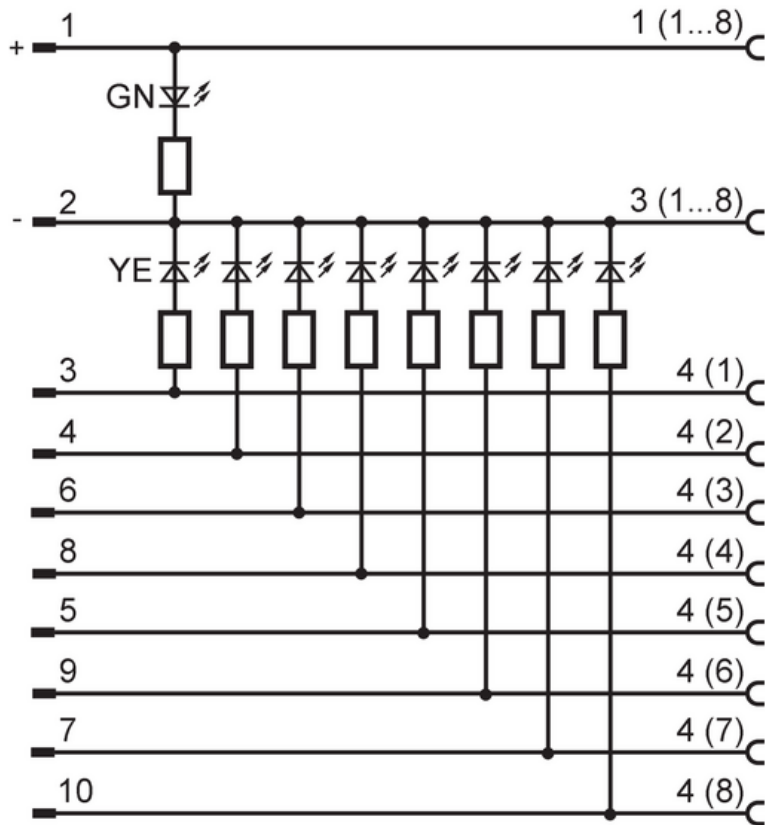

Electrical connection - slot

Connector: 8 x M8; coding: A; Contacts: 3, gold-plated; Locking: brass, nickel-plated; Tightening torque: 0.8...1.5 Nm

