




Wiring block

ZDOAF03BMSS0000---STGH120MSS

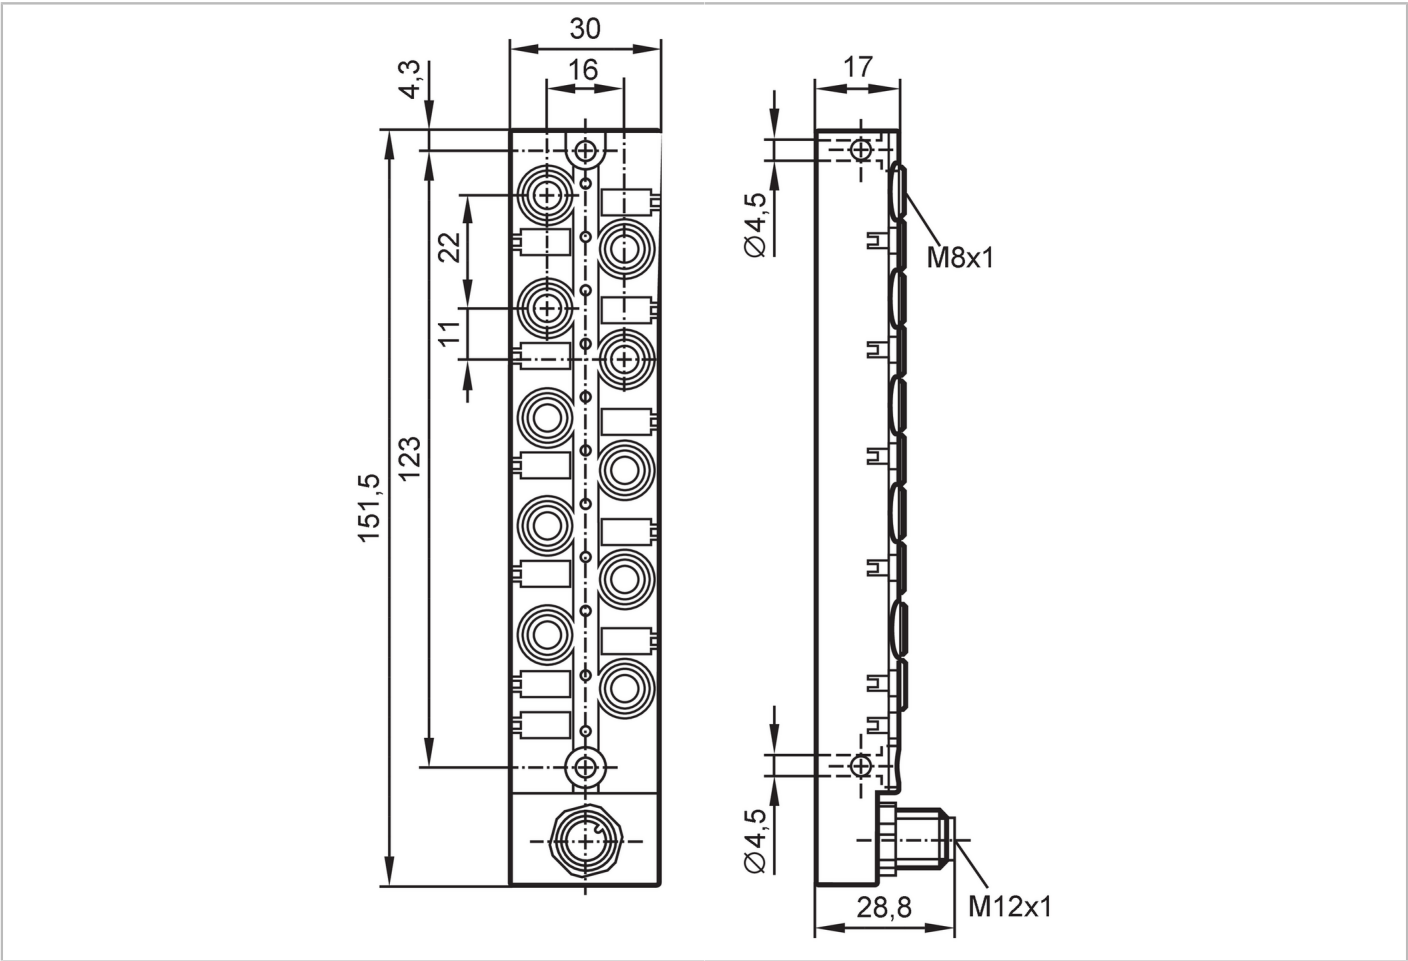

Application		
Special feature		gold-plated contacts
Application		Industrial applications; Oils and coolants
Electrical data		
Operating voltage	[V]	10...30 DC
Protection class		III
Max. current load per module/slot	[A]	2
Max. current load total	[A]	2
Outputs		
Electrical design		PNP
Operating conditions		
Ambient temperature	[°C]	-25...80
Ambient temperature (moving)	[°C]	-5...60
Protection		IP 65; IP 67; IP 68; (1 m / 7 days)
Mechanical data		
Weight	[g]	150.5
Housing		rectangular



Wiring block

ZDOAF03BMSS0000---STGH120MSS

Type of mounting	Backplane mounting
Dimensions [mm]	151.5 x 30 x 28.8
Material	housing: PBT-GF20
Material nut	brass, nickel-plated
Number of ports splitter box	10
Connector type	M8

Displays / operating elements

Display	Switching status	10 x LED, yellow
	Power	1 x LED, green

Accessories

Accessories (optional)	Protective cap: M8, E73005
------------------------	----------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------


Electrical connection - Socket

Connector: 1 x M8; coding: A; Contacts: 3, gold-plated; Locking: brass, nickel-plated; Tightening torque: 0.8...1.5 Nm



Electrical connection - plug

Connector: 1 x M12; Contacts: 12, gold-plated; Locking: brass, nickel-plated; Tightening torque: 0.8...1.5 Nm





Wiring block

ZDOAF03BMSS0000---STGH120MSS

Connection

