




Standard timer contact housing with contacts

ecomatBasic/Connection Set

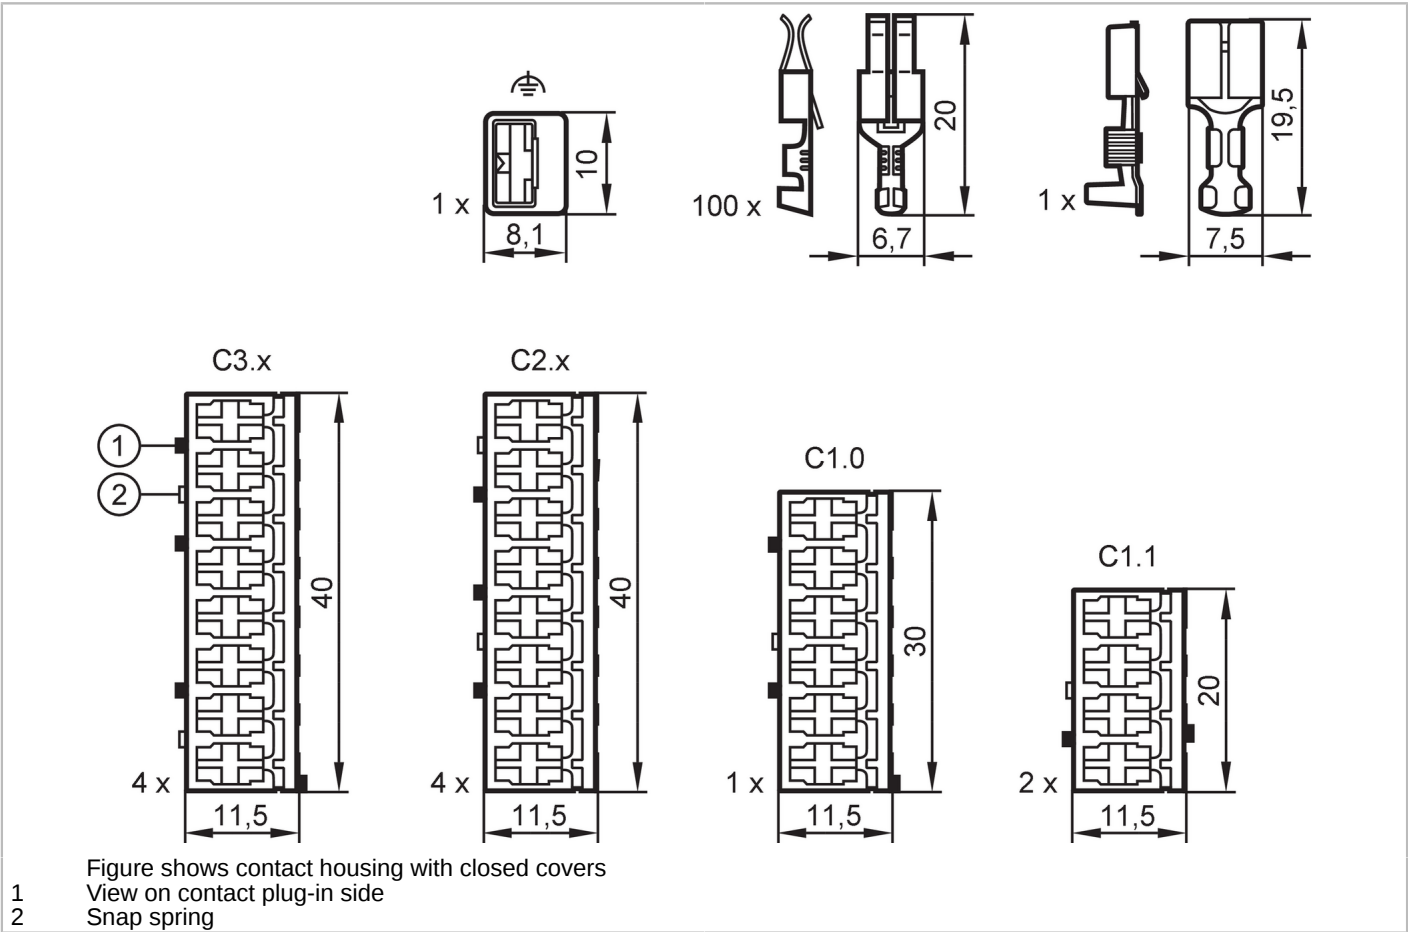

Application	
Design	for ecomatBasic
Application	Industrial applications; Use in mobile and harsh applications
Mechanical data	
Weight	[g] 105.1
Accessories	
Items supplied	Standard timer contact housing: 4 x 8-wire, grey
	Standard timer contact housing: 4 x 8-wire, natural
	Standard timer contact housing: 1 x 1-pole, natural
	Standard timer contact housing: 1 x 6-wire, natural
	Standard timer contact housing: 2 x 4-wire, natural
	standard timer contacts: 20 x (0,2...0,5 mm ²), tin-plated
	standard timer contacts: 50 x (0,5...1,0 mm ²), tin-plated
	standard timer contacts: 30 x (1,0...2,5 mm ²), tin-plated
blade female terminal: 1 x (6,3 x 0,8 mm)	
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Standard timer contact: 20 x 0.2...0.5 mm ²	
Standard timer contact: 50 x 0.5...1.0 mm ²	

EC0413



Standard timer contact housing with contacts

ecomatBasic/Connection Set

Standard timer contact: 30 x 1.0...2.5 mm²

blade female terminal: 1 x ; 6.3 mm x 0.8 mm