


EC0452



Prewired jumper with contact housing


BasicCable/Display inboard

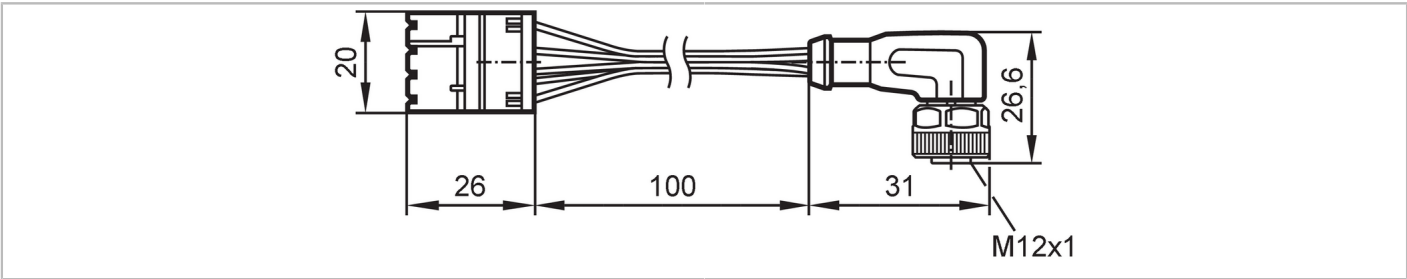

Application		
Design	wired, for BasicController and BasicDisplay, for ecomatBasic and ecomatDisplay, 4,3"	
Application	Use in mobile and harsh applications; voltage supply; CAN bus	
Operating conditions		
Ambient temperature	[°C]	-40...85
Mechanical data		
Weight	[g]	23.2
Remarks		
Remarks	CAN bus terminating resistors (120 ohm) are integrated into the standard timer contact housing and the M12 connector	
	use only sensible in conjunction with cover EC0402	
Pack quantity	1 pcs.	

Electrical connection - Socket

Connector: 1 x M12, angled; coding: A; Contacts: 5






Prewired jumper with contact housing

BasicCable/Display inboard

Electrical connection

Cable: 0.1 m; 5 x 0.34 mm²

Connection

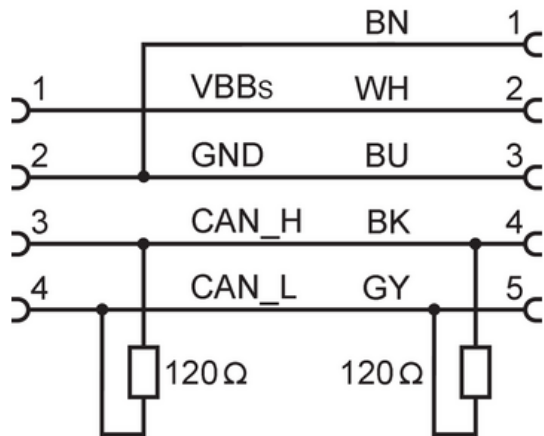

- BK =

BN =

BU =

GY =

WH =
- Core colors :

black

brown

blue

grey

white