


EC0453



Prewired jumper with contact housing


BasicCable/DisplayModules A

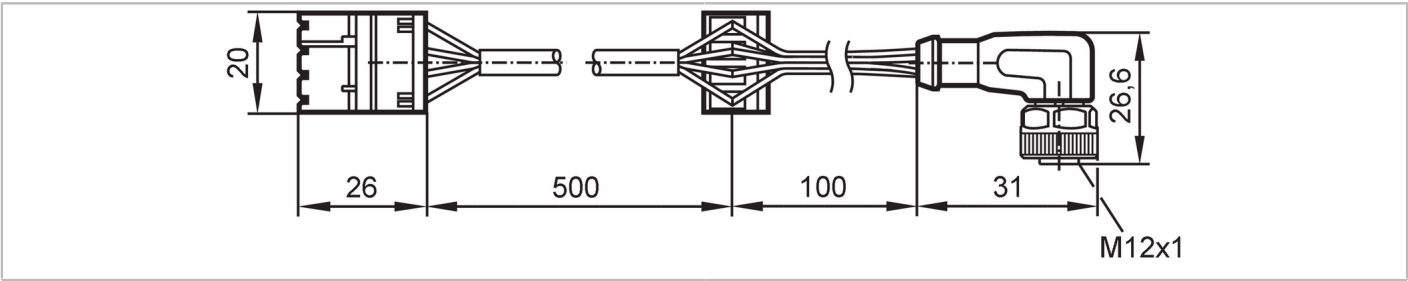

Application	
Design	wired, for BasicController and BasicDisplay, for ecomatBasic and ecomatDisplay, 4,3"
Application	Use in mobile and harsh applications; voltage supply; CAN bus
Operating conditions	
Ambient temperature	[°C] -40...85
Mechanical data	
Weight	[g] 62.2
Remarks	
Remarks	CAN bus terminating resistor (120 ohms) is integrated in the standard timer contact housing use only sensible in conjunction with cover EC0402
Pack quantity	1 pcs.

Electrical connection - Socket

Connector: 1 x M12, angled; coding: A; Contacts: 5






Prewired jumper with contact housing

BasicCable/DisplayModules A

Electrical connection

Cable: 0.5 m, PVC, black; 4 x 0.5 mm² / AWG 20

Connection



Core colors :
BK = black
BN = brown
BU = blue
GY = grey

EC0453

Prewired jumper with contact housing

BasicCable/DisplayModules A

