




Prewired jumper with contact housing


BasicCable/DisplayModules B

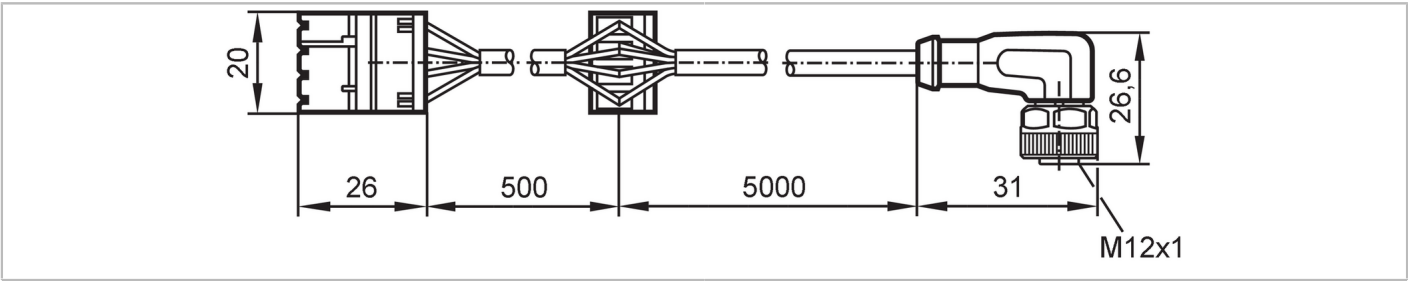

Application	
Design	wired, for BasicController and BasicDisplay, for ecomatBasic and ecomatDisplay, 4,3"
Application	Use in mobile and harsh applications; voltage supply; CAN bus
Operating conditions	
Ambient temperature	[°C] -40...85
Mechanical data	
Weight	[g] 231.7
Remarks	
Remarks	CAN bus terminating resistors (120 ohm) are integrated into the standard timer contact housing and the M12 connector
Pack quantity	1 pcs.

Electrical connection - Socket

Connector: 1 x M12, angled; coding: A; Contacts: 5






Prewired jumper with contact housing

BasicCable/DisplayModules B

Electrical connection

Cable: 5 m, black; 5 x 0.34 mm²

Connection

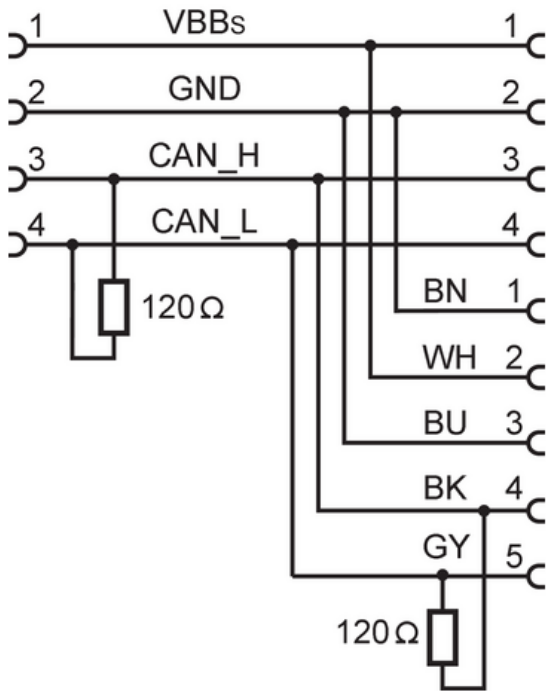

- BK =

BN =

BU =

GY =

WH =
- Core colors :

black

brown

blue

grey

white