




Connecting cordset with AMP connector

R360/CABLE/2,5M/SEALED

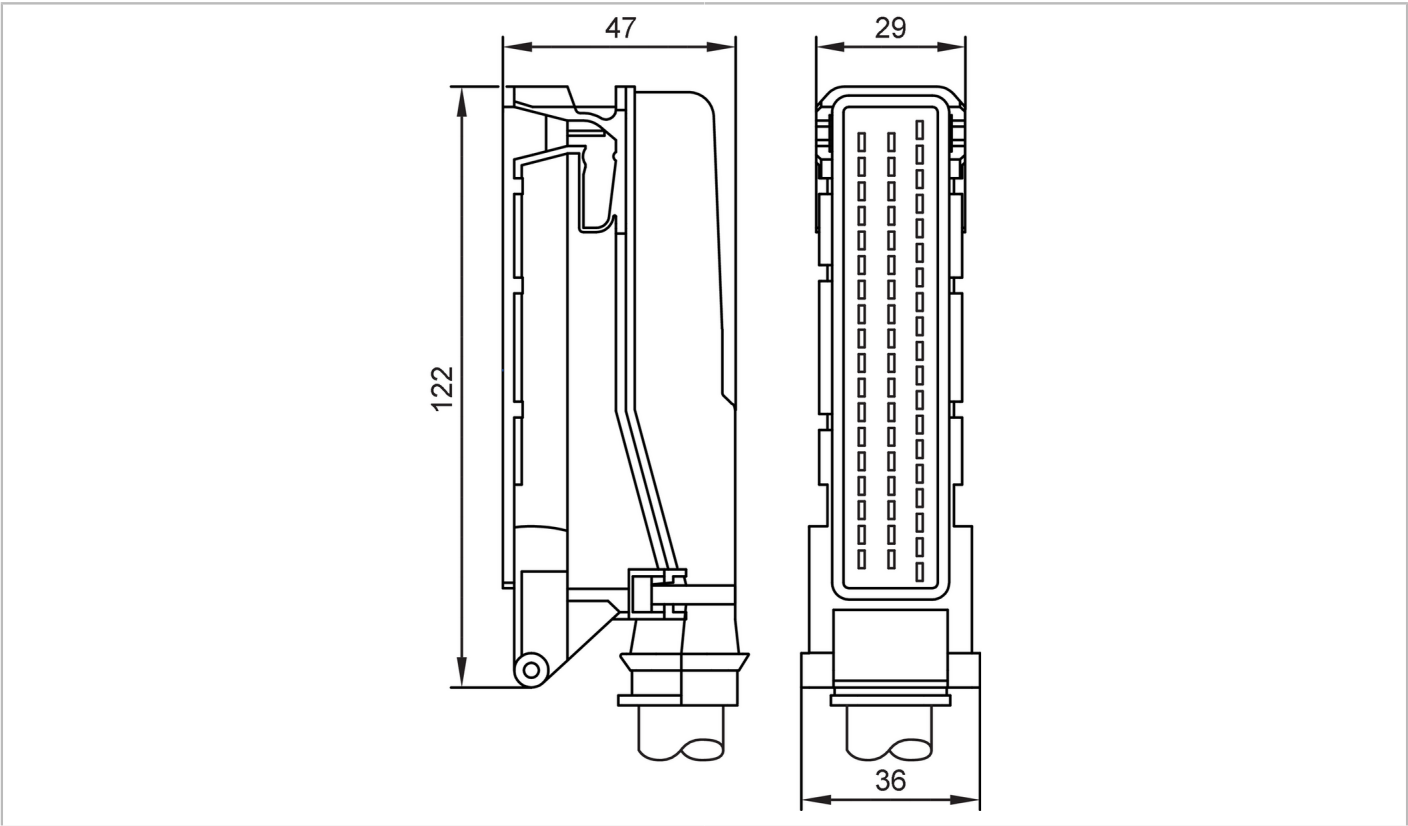

Application	
Application	Industrial applications; Use in mobile and harsh applications
Electrical data	
Operating voltage	[V] 36 DC
Operating conditions	
Ambient temperature	[°C] -40...80
Protection	IP 67
Tests / approvals	
Standard	DIN 72551-5; DIN 72551-6; DIN ISO 6722
Mechanical data	
Weight	[g] 1761.5
Remarks	
Pack quantity	1 pcs.
Electrical connection - AMP connector	
Connector: 1 x AMP-Junior Timer; Moulded body: PBT, black; 55-pole, sealing of the individual cores, lockable and with reverse polarity protection	

EC2097



Connecting cordset with AMP connector

R360/CABLE/2,5M/SEALED

Electrical connection

Cable: 2.5 m, PVC, black, Ø 22 mm; FLRY-B; 1 mm² (32 x Ø 0.21 mm)

Diagrams and graphs

connector

