




Mounting set for ecomatRelay

ecomatRelay/MountingSet/9P

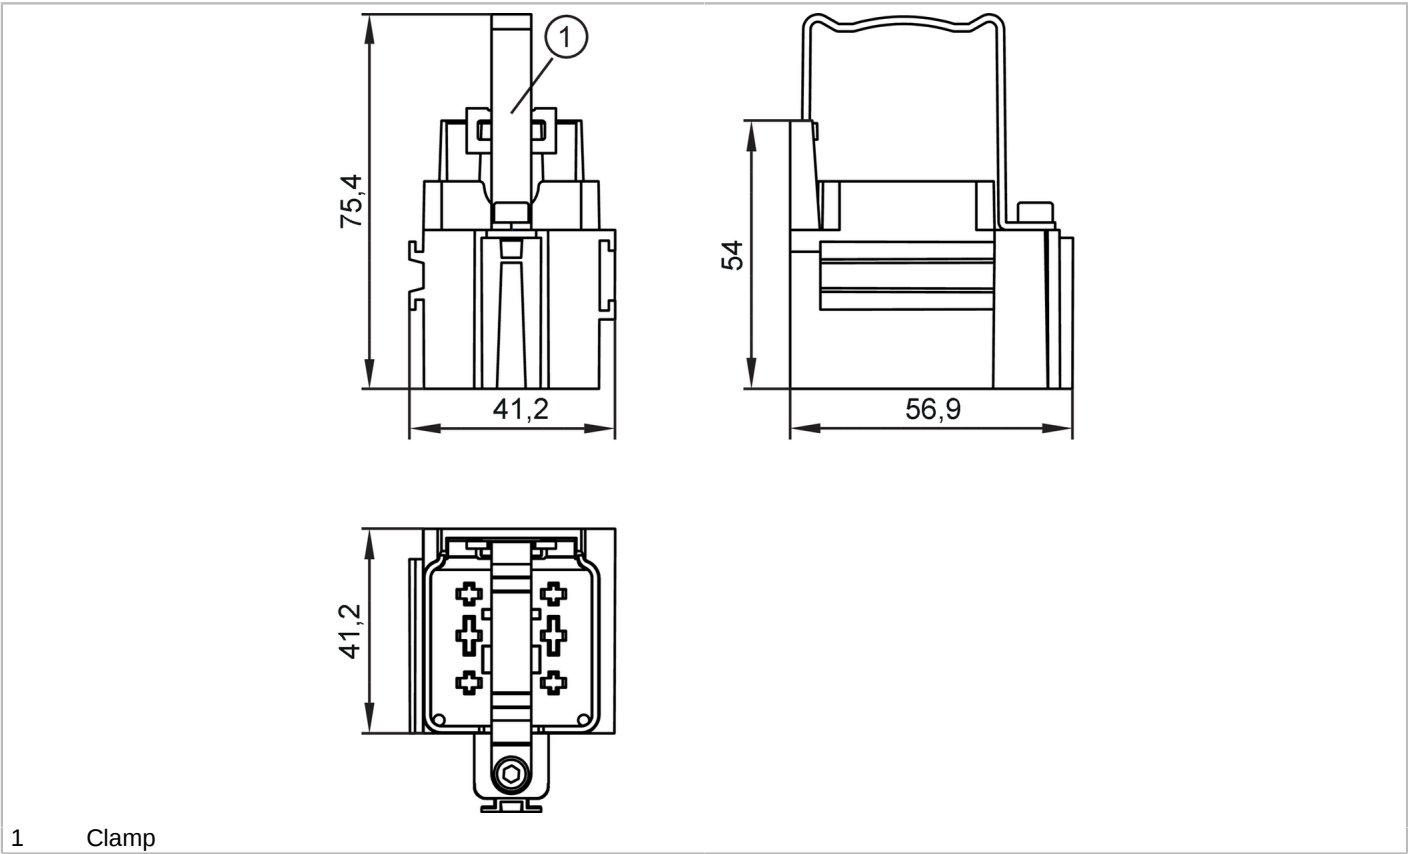

| Application                 |                                                               |                    |    |
|-----------------------------|---------------------------------------------------------------|--------------------|----|
| Design                      | for ecomatRelay CR3025                                        |                    |    |
| Application                 | Industrial applications; Use in mobile and harsh applications |                    |    |
| Operating conditions        |                                                               |                    |    |
| Ambient temperature         | [°C]                                                          | -40...85           |    |
| Protection                  | IP 67; (mating connector plugged in)                          |                    |    |
| Mechanical data             |                                                               |                    |    |
| Weight                      | [g]                                                           | 78.9               |    |
| Type of mounting            | vertical; (contacts oriented downwards)                       |                    |    |
| Dimensions                  | [mm]                                                          | 56.9 x 41.2 x 75.4 |    |
| Material                    | pole socket: PA 6.6-GF30                                      |                    |    |
| Information on service life | max. mating cycles of the crimp contacts:                     |                    | 10 |
| Accessories                 |                                                               |                    |    |
| Items supplied              | pole socket: 1, 9 poles                                       |                    |    |
|                             | Clamp: 1                                                      |                    |    |
|                             | sealing: 1                                                    |                    |    |
|                             | cylinder head bolt: 1 x (M4 x 30 mm)                          |                    |    |
|                             | Nuts: 1 x M4, self-locking                                    |                    |    |
|                             | Crimp contacts: 5 x 4,8 mm                                    |                    |    |
|                             | sealing of the individual cores: 5 x 4,8 mm                   |                    |    |
|                             | Crimp contacts: 4 x 2,8 mm                                    |                    |    |
|                             | sealing of the individual cores: 4 x 2,8 mm                   |                    |    |
|                             |                                                               |                    |    |

# EC3025



## Mounting set for ecomatRelay



ecomatRelay/MountingSet/9P

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Diagrams and graphs

Installation

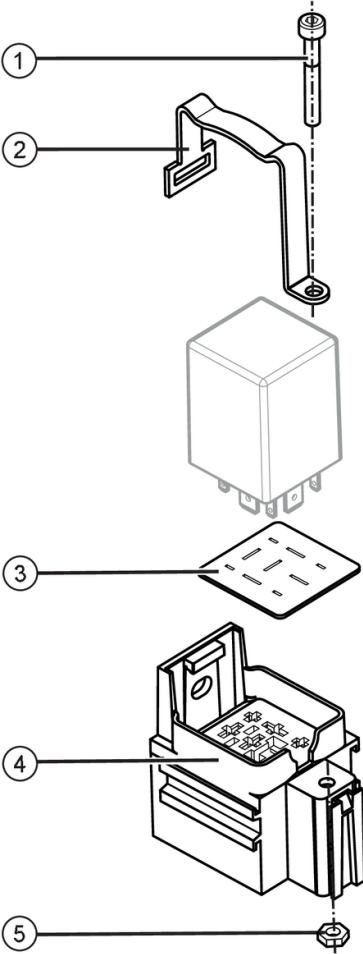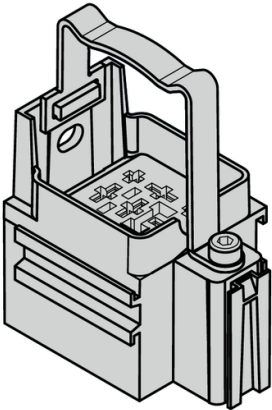

1: cylinder head bolt M4x30

2: Clamp

3: sealing

4: pole socket

5: Nut M4