


EC3148



Y connection cable


Cable/Plug&Play/M12/0.6m

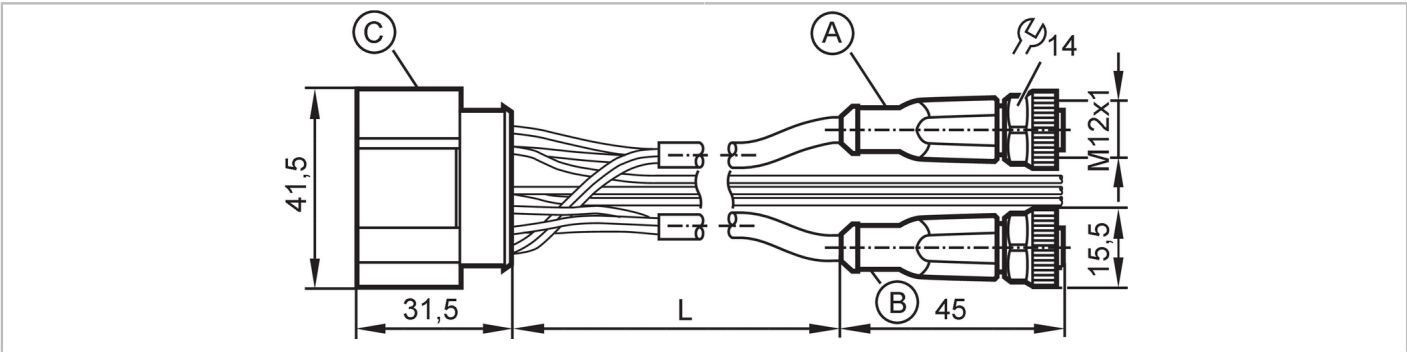

Application	
Design	Adapter cable
Application	Industrial applications; Use in mobile and harsh applications
Electrical data	
Operating voltage [V]	8...32 DC
Operating conditions	
Ambient temperature [°C]	-20...85
Mechanical data	
Weight [g]	109
Material	housing: PBT black; Socket: TPU (urethane) orange; sealing: Viton
Remarks	
Pack quantity	1 pcs.

Electrical connection - C

Connector: 1 x AMP connector, straight



Electrical connection

Cable: 0.6 m, PUR, black, Ø 5.1 mm; 5 x 0.5 mm²

Cable: 0.6 m, PUR, black, Ø 4.9 mm; 3 x 0.5 mm²

EC3148




Y connection cable

Cable/Plug&Play/M12/0.6m


Cable: 0.6 m; 2 x 0.5 mm²

Connection

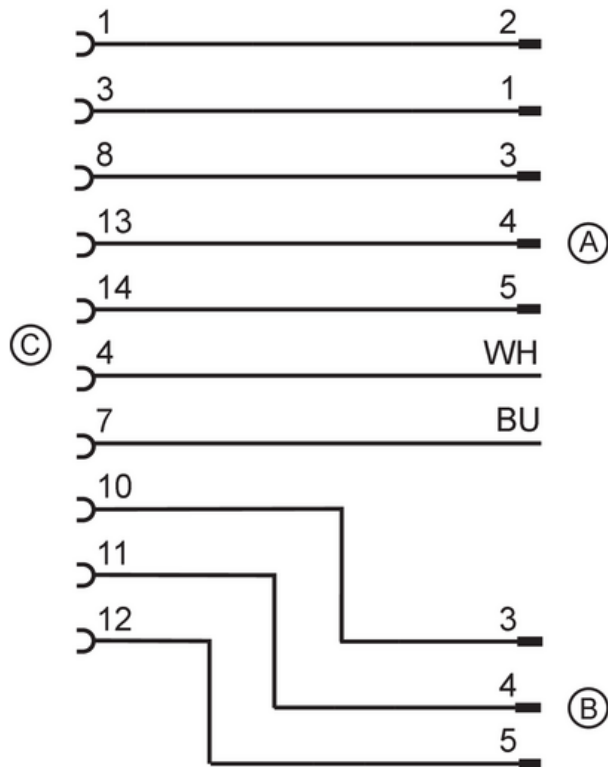

Electrical connection - A

Connector: 1 x M12, straight; coding: A; Contacts: 5; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm



Electrical connection - B

Connector: 1 x M12, straight; coding: A; Contacts: 5; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm

