




Patchcords with valve plug

VVDAA021--S01,5H03STA020MSS

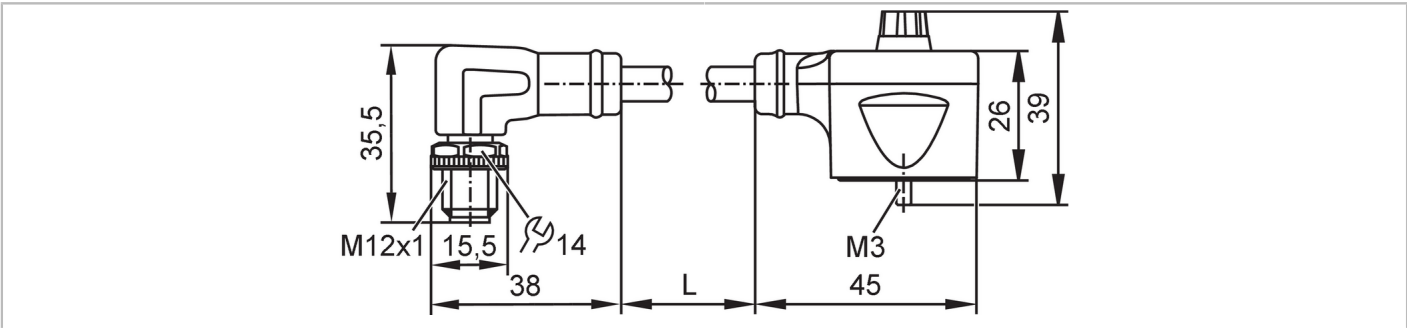

Application		
Special feature	Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability	
Design	for connection to Port Class B	
Application	Industrial applications; Oils and coolants	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 24 AC/DC
Current consumption	[mA]	< 4; (Ub = 24V)
Overvoltage protection		yes; (VDR)
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-20...90
Ambient temperature (moving)	[°C]	-25...90
Storage temperature	[°C]	-25...55
Storage humidity	[%]	10...100
Other climatic conditions for storage according to stated class		1K22/ DIN 60721-3-1
Protection		IP 67; IP 68; IP 69K; (plug M12: IP 65; IP 67; IP 68; IP 69K)
Mechanical data		
Weight	[g]	127.65
Material		housing: PA
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Sealing material		HNBR
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	Bending cycles	> 5 Mio.
	Torsional strain	± 180 °/m
Displays / operating elements		
Display	Switching status	1 x LED, yellow

EVCC57



Patchcords with valve plug

VVDAA021--S01,5H03STA020MSS

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection


Cable: 1.5 m, PUR, Halogen-free, Ø 5.4 mm; 3 x 0.75 mm² / AWG 19

Electrical connection - plug

Connector: 1 x M12, angled; coding: A; Contacts: 5, gold-plated; Moulded body: TPU (urethane), orange; Locking: brass, nickel-plated; Tightening torque: 0.6...1.5 Nm



Connection

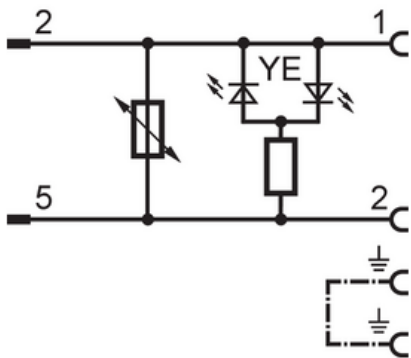

Electrical connection - Socket

Connector: 1 x valve type A DIN (EN 175301-803), angled; Contacts: 4; Moulded body: TPU (urethane), black; sealing: HNBR; Tightening torque: 0.3...0.4 Nm

