




## Y connection cable

YDOAH032VAS0002E03STGH040VAS

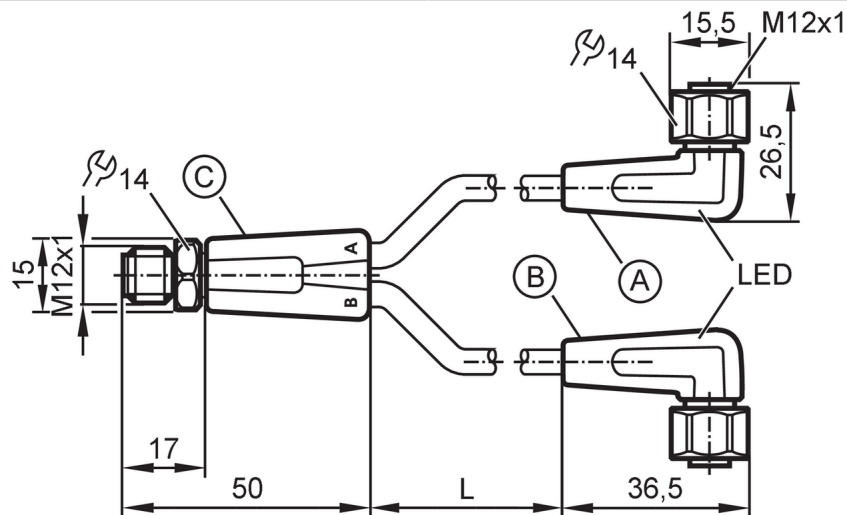

## Application

|                    |                                                                  |
|--------------------|------------------------------------------------------------------|
| Special feature    | Free from silicone; gold-plated contacts; Drag chain suitability |
| Application        | sanitary and wet areas in the food industry                      |
| Free from silicone | yes                                                              |

## Electrical data

|                         |     |            |
|-------------------------|-----|------------|
| Operating voltage       | [V] | 10...36 DC |
| Protection class        |     | II         |
| Max. current load total | [A] | 4          |

## Outputs

|                   |     |
|-------------------|-----|
| Electrical design | PNP |
|-------------------|-----|

## Operating conditions

|                                      |      |                             |
|--------------------------------------|------|-----------------------------|
| Ambient temperature                  | [°C] | -25...100                   |
| Note on ambient temperature          |      | cULus: ...50                |
| Ambient temperature (moving)         | [°C] | 5...100                     |
| Note on ambient temperature (moving) |      | cULus: ...50                |
| Protection                           |      | IP 65; IP 67; IP 68; IP 69K |

## Mechanical data

|                              |     |                                 |
|------------------------------|-----|---------------------------------|
| Weight                       | [g] | 176.7                           |
| Molded-body material         |     | PVC                             |
| Material nut                 |     | stainless steel (1.4404 / 316L) |
| Sealing material             |     | EPDM                            |
| Number of ports splitter box |     | 2                               |
| Drag chain suitability       |     | yes                             |



Y connection cable

YDOAH032VAS0002E03STGH040VAS

|                        |                                          |                                                                                                |
|------------------------|------------------------------------------|------------------------------------------------------------------------------------------------|
| Drag chain suitability | Bending radius for flexible applications | min. 10 x cable diameter                                                                       |
|                        | Travel speed                             | max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup> |
|                        | Bending cycles                           | > 1 Mio.                                                                                       |
|                        | Torsional strain                         | ± 180 °/m                                                                                      |

Displays / operating elements

|         |                  |                 |
|---------|------------------|-----------------|
| Display | Switching status | 1 x LED, yellow |
|         | Power            | 1 x LED, green  |

Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

Electrical connection

Cable: 2 m, PVC, orange, Ø 4.9 mm; 3 x 0.34 mm<sup>2</sup> (42 x Ø 0.1 mm )


Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 4, gold-plated; Moulded body: PVC, orange; Locking: stainless steel (1.4404 / 316L); Tightening torque: 0.6...1.5 Nm



Electrical connection

Connection

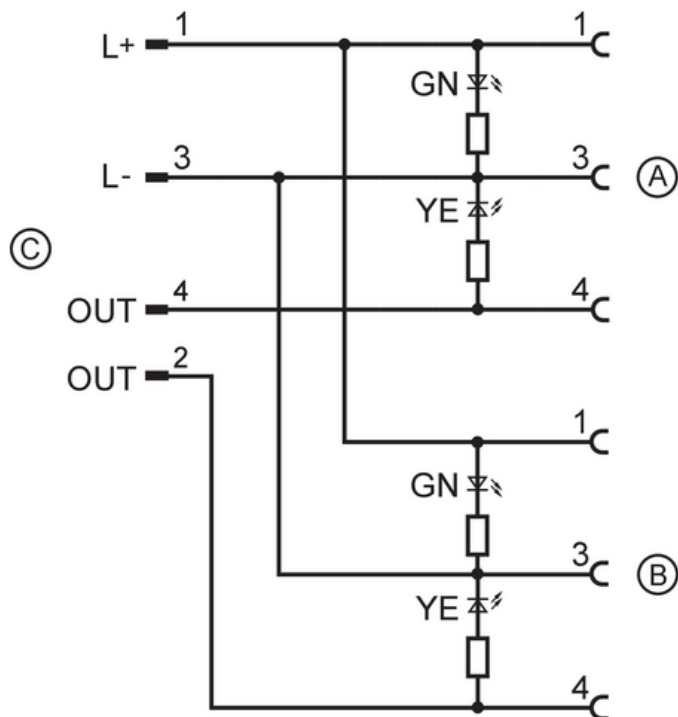

Electrical connection - Socket

Connector: 2 x M12, angled; coding: A; Contacts: 3, gold-plated; Moulded body: PVC, black transparent; Locking: stainless steel (1.4404 / 316L); sealing: EPDM; Tightening torque: 0.6...1.5 Nm

