


EVW110



Y connection cable

YDOGH030SCS00,3T03STGH040SCS

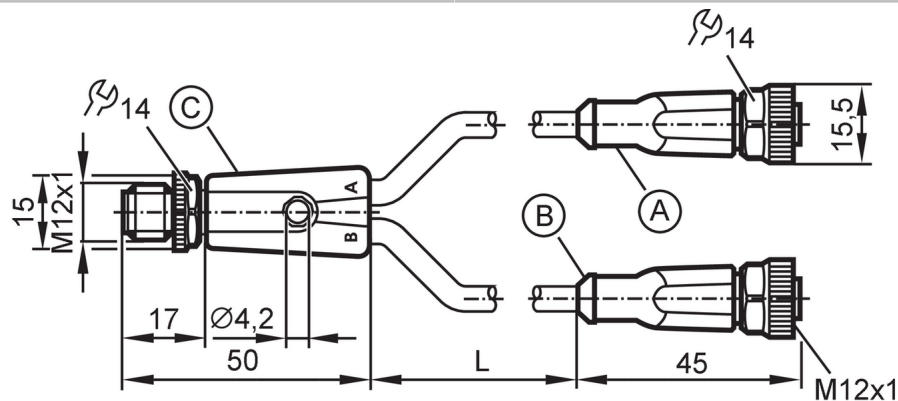

Application		
Special feature	Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability	
Application	welding applications	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 60 AC/DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Ambient temperature (moving)	[°C]	-25...90
Storage temperature	[°C]	-25...55
Storage humidity	[%]	10...100
Other climatic conditions for storage according to stated class	1K22/ DIN 60721-3-1	
Protection	IP 65; IP 67; IP 68; IP 69K	
Mechanical data		
Weight	[g]	66.8
Molded-body material	TPU (urethane)	
Material nut	brass, weld coated	
Sealing material	FKM	
Number of ports splitter box	2	
Drag chain suitability	yes	
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	Bending cycles	> 2 Mio.
	Torsional strain	± 180 °/m
Remarks		
Remarks	without label holders	

EVW110



Y connection cable

YDOGH030SCS00,3T03STGH040SCS

Pack quantity

1 pcs.


Electrical connection - plug C

Connector: 1 x M12, straight; coding: A; Contacts: 4, gold-plated; Moulded body: TPU (urethane), orange; Locking: brass, weld coated; Tightening torque: 0.6...1.5 Nm



Electrical connection

Connection

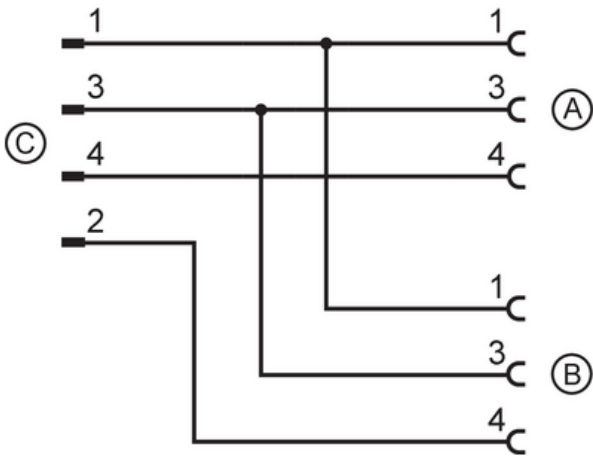

Electrical connection - Socket A/B

Cable: 0.3 m, PUR, Halogen-free, grey, Ø 4.9 mm; not irradiated (can be recycled); resistant to welding sparks; 3 x 0.34 mm² (42 x Ø 0.1 mm)

Connector: 2 x M12, straight; coding: A; Contacts: 3, gold-plated; Moulded body: TPU (urethane), orange; Locking: brass, weld coated; sealing: FKM; Tightening torque: 0.6...1.5 Nm

